

VIA

User's Manual

VIA EPIA-V

Mini-ITX Mainboard

Version 1.2
December, 2003

P/N 99-51-012551-12

Copyright

Copyright by VIA Technologies Inc. (“VIA”). No part of this manual may be reproduced or transmitted in any form without express written authorization from VIA.

Trademarks

All trademarks are the property of their respective holders.

Data protection

All data should be backed-up prior to the installation of any drive unit or storage peripheral. VIA will not be responsible for any loss of data resulting from the use, disuse or misuse of this or any other VIA product.

No Warranty

VIA has made every effort to ensure the accuracy of the content of this manual. However, it is possible that it may contain technical inaccuracies or typographical or other errors. VIA will assume no liability for any inaccuracy found in this publication, nor for damages, direct, indirect, incidental, consequential or otherwise, that may result from such an inaccuracy, including without limitation loss of data or profits.

VIA provides this manual “as is”, and does not issue a warranty of any kind, express or implied, including without limitation implied warranties of merchantability or fitness for a particular purpose.

The information provided in this manual is subject to change without notice. VIA reserves the right to alter product designs, layouts or drivers without notification.



FCC-B Radio Frequency Interference Statement

This equipment has been tested and found to comply with the limits for a class B digital device, pursuant to part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference, in which case the user will be required to correct the interference at his own expense.


Notice 1

The changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Notice 2

Shielded interface cables and A.C. power cord, if any, must be used in order to comply with the emission limits.

VOIR LA NOTICE D'INSTALLATION AVANT DE RACCORDER AU RESEAU.

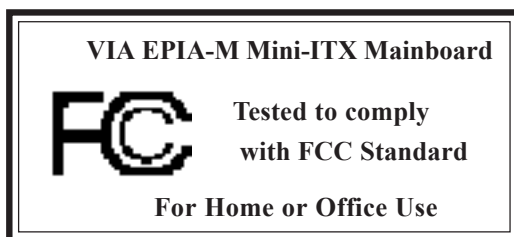

Copyright Notice

We take every care in the preparation of this document, but no guarantee is given as to the correctness of its contents. Our products are under continual improvement and we reserve the right to make changes without notice.

Trademarks

All trademarks used in this manual are the property of their respective owners.

PS/2 and OS/2 are registered trademarks of IBM Corporation.
Windows 95/98/98SE/ME/2000/NT and Windows XP are registered trademarks of Microsoft.

Netware is a registered trademark of Novell.

Award is a registered trademark of Award Software Inc.

Safety Instructions

NOTE

1. Always read the safety instructions carefully.
2. Keep this User's Manual for future reference.
3. Keep this equipment away from humidity.
4. Lay this equipment on a reliable flat surface before setting it up.
5. The openings on the enclosure are for air convection hence protects the equipment from overheating. **DO NOT COVER THE OPENINGS.**
6. Make sure the voltage of the power source and adjust properly 110/220V before connecting the equipment to the power inlet.
7. Place the power cord in such a way that people cannot step on it. Do not place anything over the power cord.
8. Always unplug the power cord before inserting any add-on card or module.
9. All cautions and warnings on the equipment should be noted.
10. Never pour any liquid into the opening. Liquid can cause damage or electrical shock.
11. If any of the following situations arises, get the equipment checked by a service personnel:
 - The power cord or plug is damaged
 - Liquid has penetrated into the equipment
 - The equipment has been exposed to moisture
 - The equipment has not work well or you can not get it work according to User's Manual.
 - The equipment has dropped and damaged
 - If the equipment has obvious sign of breakage
12. **DO NOT LEAVE THIS EQUIPMENT IN AN ENVIRONMENT UNCONDITIONED, STORAGE TEMPERATURE ABOVE 60°C (140°F), IT MAY DAMAGE THE EQUIPMENT.**

CAUTION: Explosion or serious damage may occur if the battery is incorrectly replaced. Replace only with the same or equivalent type recommended by the manufacturer.

Box Contents

This VIA EPIA-V Mini-ITX Mainboard package should contain the following items:

- 1 x VIA EPIA-V Mini-ITX Mainboard
- 1 x User's manual
- 1 x ATA-33/66/100 Hard drive ribbon cable
- 1 x Floppy ribbon cable
- 1 x I/O Bracket
- 1 x Driver Utilities CD

Contents

Specifications	1-1
Mainboard Specifications	1-2
Mainboard Layout	1-4
Connectors Guide	1-5
Installation	2-1
CPU	2-2
The VIA C3™ E-Series Processor	2-2
The VIA Eden Processor	2-3
Memory Installation	2-4
SDRAM Module Installation Procedures	2-4
Available SDRAM Configurations	2-5
Power Supply	2-6
ATX 20-Pin Power Connector: ATXPWR	2-6
Back Panel	2-7
Mouse Connector: JMS1	2-7
Keyboard Connector: JKB1	2-7
USB Port Connectors	2-8
RJ-45 NIC Port	2-8
Parallel Port Connector: LPT1	2-8
Serial Port Connector: COM 1	2-9
S-Video Port	2-9
Audio Port Connectors	2-9
RCA Video or S/PDIF Port	2-9
VGA Out	2-9
Connectors	2-10
Hard Disk Connectors: IDE1	2-10
Front Panel Connector (J3)	2-11
CD-ROM Line In Connector (J7)	2-11
FIR Module Connector (J5)	2-12
PS2 Connector (J6)	2-12
Wake On Modem Connector (J8)	2-13
USB Port 2&3 Connector (F_USB)	2-13

Video In Connector (J12)	2-14
Floppy Disk Drive Connector: FDD	2-14
Jumpers	2-15
Clear CMOS Jumper: CLEAR_CMOS	2-15
Host Frequency Select (J13)	2-16
Auto Reboot Function Setting (J2)	2-17
RCA Video or S/PDIF Select (J11)	2-17
Slots	2-18
PCI Slots	2-18
PCI Interrupt Request Routing	2-19

BIOS Setup 3-1

Entering Setup	3-2
Control Keys	3-2
Getting Help	3-3
The Main Menu	3-4
Standard CMOS Features	3-6
Advanced BIOS Features	3-8
Advanced Chipset Features	3-11
Integrated Peripherals	3-13
Power Management Setup	3-16
PNP/PCI Configurations	3-21
PC Health Status	3-23
Frequency/Voltage Control	3-24
Load Fail-Safe Defaults	3-25
Load Optimized Defaults	3-26
Set Supervisor/User Password	3-27
Save & Exit Setup	3-29
Exit Without Saving	3-30

Software Setup 4-1

 Driver Utilities CD Content 4-2

 Getting Started 4-2

 Running the Driver Utilities CD 4-2

 CD Content 4-2

1

Specifications

The ultra-compact and highly intergrated VIA EPIA-V Mini-ITX Mainboard is the smallest form factor mainboard specification available today, developed by VIA Technologies, Inc as part of the company's open industry-wide Total Connectivity initiative. The VIA EPIA-V Mini-ITX mainboard enables the creation of an exciting new generation of small, ergonomic, innovative and affordable embedded systems. Through high level of integration, mini-ITX only occupy 66% of the size of FlexATX mainboard form factor. The mainboard comes with an embedded VIA Processor, boasting ultra low power consumption and cool, quiet operation.

This chapter includes the following sections:

Mainboard Specifications	1-2
Mainboard Layout	1-4
Components Guide	1-5

Specifications

CPU

- Embeddeed VIA Processor
- Enhanced Ball Grid Array Package (EBGA)
- Internal L1 128KB and L2 64KB cache memory

Chipset

- VIA 8601A North Bridge
- VT8231 South Bridge

Graphics

- Integrated Trident Blade 3D graphics core

Audio

- VT1612A 2 channel AC'97Codec
- 3 Audio jacks: Line-in, Line-out and Mic-in

Main Memory

- 2 x PC100/133 DIMM slots.

PCI Bus IDE

- Ultra DMA 33/66/100

LAN

- VIA VT6103 10/100 Base-T Ethernet PHY

USB

- 2 USB ports
- 1 onboard USB pin header for up to 2 additional connections
- USB v1.1 and Intel Universal HCI v1.1 compatible

TV-Out (Optional)

- VIA VT1621 TV-Out Controller

Onboard I/O Connectors

- 1 USB connector for 2 USB 1.1 ports
- CD Audio-in connector
- FIR connector
- PS2 connector
- Wake-on-Modem
- CPU/Sys FAN

Back Panel I/O

- 1 PS2 mouse port
- 1 PS2 keyboard port
- 1 Parallel
- 1 RJ45 LAN port
- 1 Serial port
- 2 USB 1.1 ports
- 1 VGA port
- 1 RCA port (S/PDIF or TV out)
- 1 S-Video port

Power

- Supports ATX type power supply

Onboard Floppy

- 1 FDD connector


BIOS

- Award BIOS
- 2/4Mbit flash memory

Form Factor

- Mini-ITX (4 layers)
- 17 cm x 17 cm

Layout

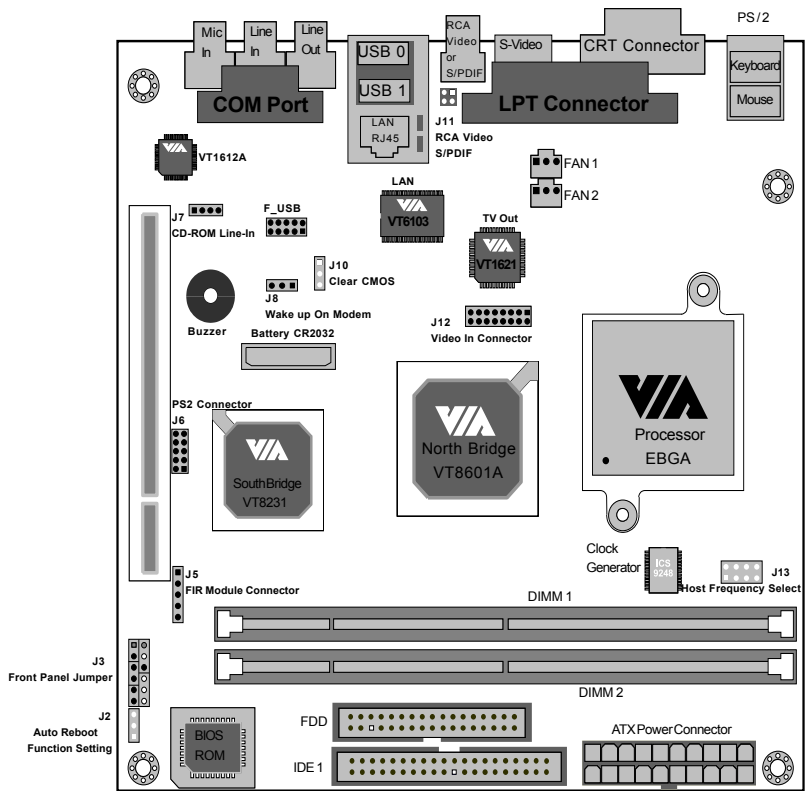

VIA EP800-V Mini-ITX Mainboard

Connectors Guide

Component	Function	Reference
Fan 1, Fan 2	Fan power connectors	See p. 2-2
DIMM1, DIMM2	DIMM slot	See p. 2-4
ATX Power Connector	Connecting ATX power supply	See p. 2-6
PS/2 Mouse	Mouse connector	See p. 2-7
PS/2 Keyboard	Keyboard connector	See p. 2-7
LPT Connector	Parallel port connector	See p. 2-8
RJ-45 Port	Connecting to a LAN	See p. 2-8
USB 0, USB 1	Connecting to USB devices	See p. 2-8
COM Port	COM port connector	See p. 2-9
Line Out	Connecting Headphones/Speakers	See p. 2-9
Line In	Connecting an audio device	See p. 2-9
Mic In	Connecting a Micorphone	See p. 2-9
RCA Video or S/P DIF	Connecting to RCA Video or SPDIF	See p. 2-9
S-Video	Connecting to S-Video	See p. 2-9
VGA Out	Connect to a VGA monitor	See p. 2-9
IDE 1	Connecting an IDE device	See p. 2-10
J3	Front panel connector	See p. 2-11
J7	CD-ROM Line in connector	See p. 2-11
J5	FIR module connector	See p. 2-12
J6	PS2 connector	See p. 2-12
J8	Wake on Modem	See p. 2-13
F_USB	USB Port 2 &3 Connector	See p. 2-13
J12	Video in connector	See p. 2-14
FDD	Floppy disk drive connector	See p. 2-14
J10	Clear CMOS jumper	See p. 2-15
J13	Host Frequency Select	See p. 2-16
J2	Auto Reboot Function Setting	See p. 2-17
J11	RCA Video / S/P DIF	See p. 2-17
PCI Slot	Connecting to expansion cards	See p. 2-18
PCIIRQ	PCI Interrupt Request Routing	See p. 2-19

2

Installation


This chapter provides you with the information about hardware setup procedures. While installing, please be careful in holding the components and follow the installation procedures. Some components could be damaged if they are installed incorrectly. If possible, use a grounded wrist strap before handling computer components. The components can be damaged by static electricity.

This chapter contains the following topics:

Central Processing Unit (CPU)	2-2
Memory Installation	2-4
Power Supply	2-6
Back Panel	2-7
Connectors	2-10
Jumpers	2-15
Slots	2-18
PCI Interrupt Request Routing	2-19


CPU

The VIA EPIA-V Mini-ITX Mainboard includes an embedded VIA Eden Processor or VIA C3™ E-Series Processor. Two fan connectors (Fan 1 & Fan 2) are provided on the mainboard, allowing for the connection of a CPU fan and an additional system case fan.

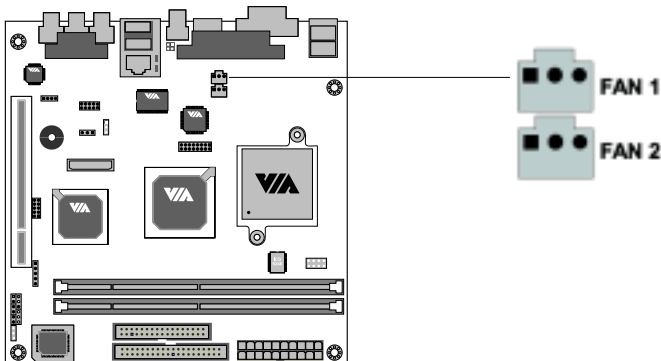

The VIA C3™ E-Series Processor


With low power consumption and advanced thermal dissipation properties, the embedded VIA C3™ E-Series requires only a small fan to guarantee performance and reliability. Ensure that the CPU Fan Connector is correctly installed, as displayed below.

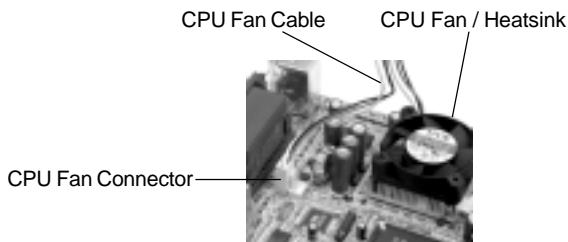

The VIA Eden Processor

Providing ultra-low power consumption and advanced thermal dissipation properties, the VIA Eden Processor features a fanless design. The VIA Eden Processor requires only a heatsink, as shown below.

CPU Heatsink




WARNING!

Overclocking

*This motherboard is not designed to support overclocking. Any attempt to operate beyond product specifications is not recommended. **We do not guarantee the damages or risks caused by operation beyond product specifications.***

Memory Installation

The VIA EPIA-V Mini-ITX Mainboard provides two 168-pin DIMM slots for PC 100/133 SDRAM memory modules. To operate properly, at least one module must be installed.

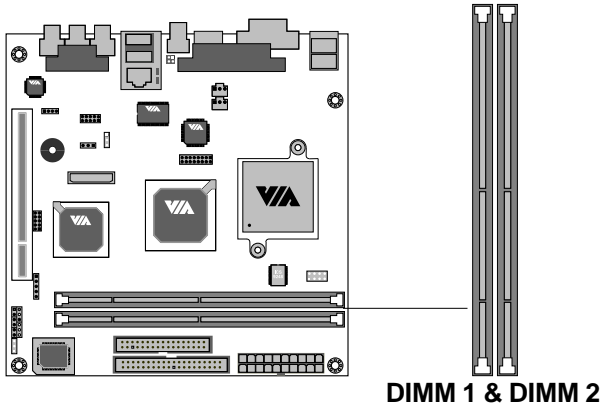

SDRAM Module Installation Procedures

- 1.) Push the white retaining latches at either end of the DIMM slot outwards.
- 2.) Align the SDRAM module with the corresponding notches on the DIMM slot. The modules will only fit if placed in the correct position.
- 2.) With both hands, press the SDRAM module down into the DIMM slot so that the white retaining latches rotate up and secure the module in place (see picture below).



Available SDRAM Configurations

Refer to the table below for available SDRAM configurations on the VIA EPIA-V Mini-ITX Mainboard.


Socket	Memory Module	Total Memory
DIMM 1	32MB, 64MB, 128MB, 256MB, 512MB	32MB~512MB
DIMM 2	32MB, 64MB, 128MB, 256MB, 512MB	32MB~512MB
Maximum System Memory Supported		1GB

Power Supply

The VIA EPIA-V Mini-ITX Mainboard requires an ATX power supply to be connected. Before inserting the power supply connector, always make sure that all components are installed correctly to ensure that no damage will be caused.

ATX 20-Pin Power Connector


To connect the ATX power supply, make sure the plugs of the power supply are inserted in the proper orientation and the pins are correctly aligned. Then, push down the power supply plug firmly into the connector.

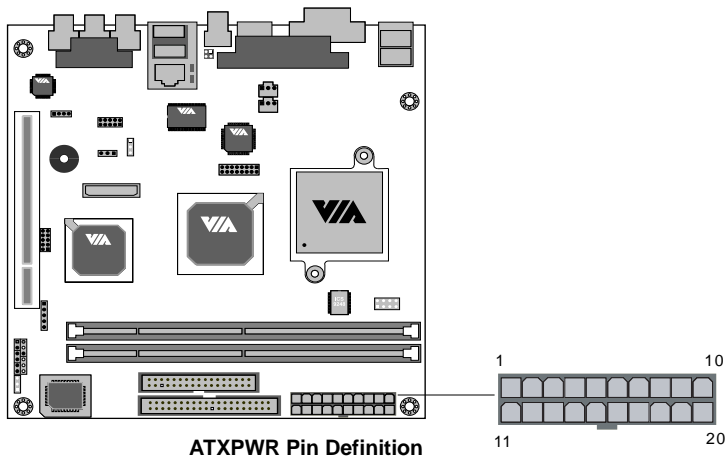

PIN	SIGNAL	PIN	SIGNAL
1	3.3V	11	3.3V
2	3.3V	12	-12V
3	GND	13	GND
4	5V	14	PS_ON
5	GND	15	GND
6	5V	16	GND
7	GND	17	GND
8	PW_OK	18	NC
9	5V_SB	19	5V
10	12V	20	5V


Back Panel

The back panel of the VIA EPIA-V Mini-ITX Mainboard contains the following connectors:

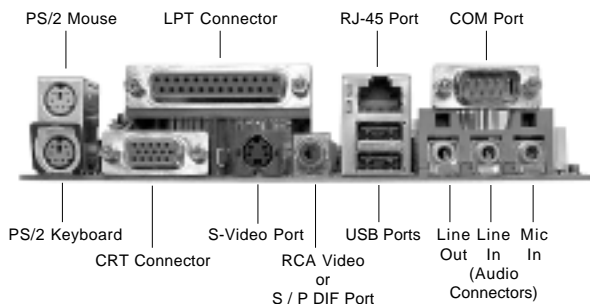

Mouse Connector: JMS1


The mainboard provides a standard PS/2 mouse connector for attaching a PS/2 mouse. You can plug a PS/2 mouse directly into this connector. The connector location and pin assignments are as follows:



PS/2 Mouse (6-pin Female)

Keyboard Connector: JKB1

The mainboard provides a standard PS/2 keyboard connector for attaching a PS/2 keyboard. You can plug a PS/2 keyboard directly into this connector.



PS/2 Keyboard (6-pin Female)

Pin Definition

PIN	SIGNAL	DESCRIPTION
1	Mouse DATA	Mouse DATA
2	NC	No connection
3	GND	Ground
4	VCC	+5V
5	Mouse Clock	Mouse clock
6	NC	No connection


Pin Definition

PIN	SIGNAL	DESCRIPTION
1	Keyboard DATA	Keyboard DATA
2	NC	No connection
3	GND	Ground
4	VCC	+5V
5	Keyboard Clock	Keyboard Clock
6	NC	No connection

Chapter 2

USB Port Connectors

The mainboard provides 2 USB 1.1 ports (plus 1 pin-headers for up to 2 additional USB connections). USB-compatible devices can be plugged directly into these ports.




USB Ports

Pin Definition

PIN	SIGNAL	DESCRIPTION
1	VCC	+5V
2	-Data 0	Negative Data Channel 0
3	+Data 0	Positive Data Channel 0
4	GND	Ground
5.	VCC	+5V
6.	-Data 1	Negative Data Channel 1
7.	+Data 1	Positive Data Channel 1
8.	GND	Ground


RJ-45 NIC Port

The mainboard provides one standard RJ-45 port for connection to the Local Area Network (LAN). You can connect a network cable to the LAN port.



Parallel Port Connector: LPT1

The mainboard provides a 25-pin female connector for LPT (parallel port). A parallel port is a standard printer port that supports Enhanced Parallel Port (EPP) and Extended Capabilities Parallel Port (ECP) modes.

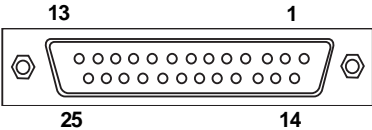


Pin Definition

PIN	SIGNAL	DESCRIPTION
1	STROBE	Strobe
2	DATA0	Data0
3	DATA1	Data1
4	DATA2	Data2
5	DATA3	Data3
6	DATA4	Data4
7	DATA5	Data5
8	DATA6	Data6
9	DATA7	Data7
10	ACK#	Acknowledge
11	BUSY	Busy
12	PE	Paper End
13	SELECT	Select
14	AUTO FEED#	Automatic Feed
15	ERR#	Error
16	INIT#	Initialize Printer
17	SLIN#	Select In
18	GND	Ground
19	GND	Ground
20	GND	Ground
21	GND	Ground
22	GND	Ground
23	GND	Ground
24	GND	Ground
25	GND	Ground

Serial Port Connectors: COM 1

The mainboard offers one 9-pin male Serial Port connector (COM 1) . You can attach a serial mouse or other serial devices directly to this port.




9-Pin Male DIN Connectors

Pin Definition

PIN	SIGNAL	DESCRIPTION
1	DCD	Data Carry Detect
2	SIN	Serial In or Receive Data
3	SOUT	Serial Out or Transmit Data
4	DTR	Data Terminal Ready
5.	GND	Ground
6.	DSR	Data Set Ready
7.	RTS	Request To Send
8.	CTS	Clear To Send
9.	RI	Ring Indicate

S-Video Port


This port allows S-Video output in NTSC and PAL modes.



Audio Port Connectors

Line-Out is a connector for speakers or headphones. The **Line-In** connector can be used for an external CD player, tape player, or other audio devices. The **Mic-In** connector is for connecting microphones.

1/8" Stereo Audio Connectors




RCA Video or S/PDIF Port

This dual function port may be used either as a RCA Video port or as a S/PDIF port.



VGA Out

A DB-15 pin female connector that connects to a VGA monitor.




Connectors

The VIA EPIA-V Mini-ITX Mainboard provides the following connectors:

Hard Disk Connectors: IDE1

The mainboard has a 32-bit Enhanced PCI IDE and Ultra DMA 33/66/100 controller that provides PIO mode 0~4, Bus Master, and Ultra DMA 33/66/100 functions. You can connect up to two hard disk drives, CD-ROM, LS-120 and other devices. These connectors utilize the provided IDE hard disk cable.

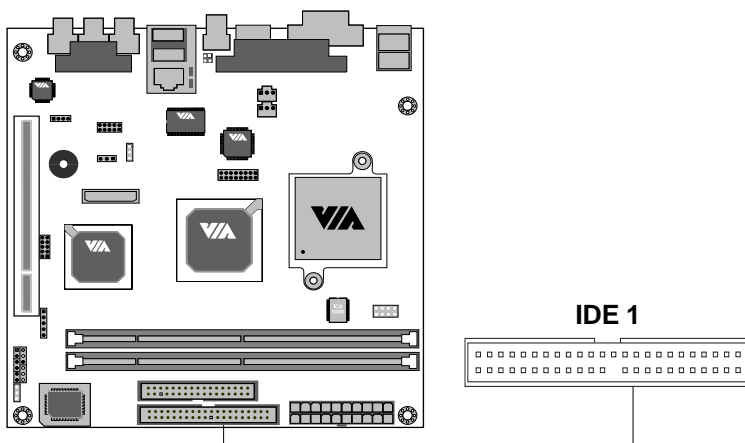

IDE1 (Primary IDE Connector)


The first hard drive should always be connected to IDE1. IDE1 can connect a Master and a Slave drive.



TIP: If you install two hard disks on cable, you must configure the second drive to Slave mode by setting its jumper. Refer to the hard disk documentation supplied by hard disk vendors for jumper setting instructions.


Front Panel Connector (J3)

The J3 front panel connectors allow you to connect the Power Switch, Reset Switch, Power LED and HDD LED to the system case.

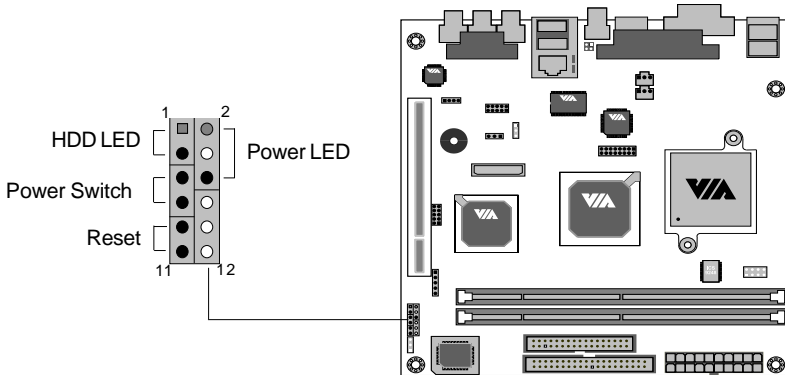

CD-ROM Line In Connector (J7)


The J7 internal CD-ROM Line In Connector allows you to connect and receive audio input from a device such as a CD-ROM.

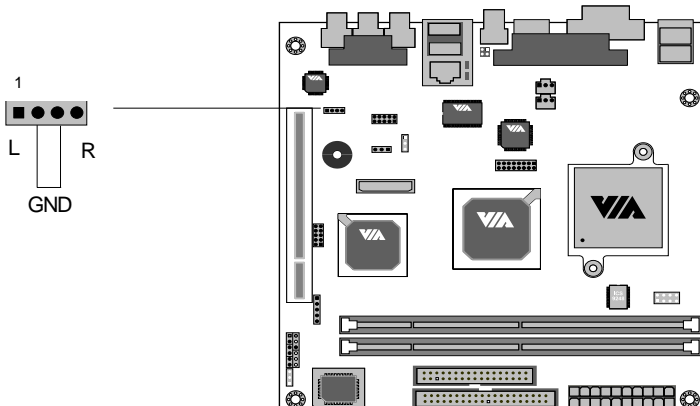

FIR Module Connector (J5)


The FIR Module Connector (J5) allows you to connect a Fast Infrared standard module. You must configure the setting through the BIOS setup to activate the IR function.

Pin Definition	
PIN	SIGNAL
1	+3V
2	IRRX
3	IRRX2
4	GND
5	IRTX

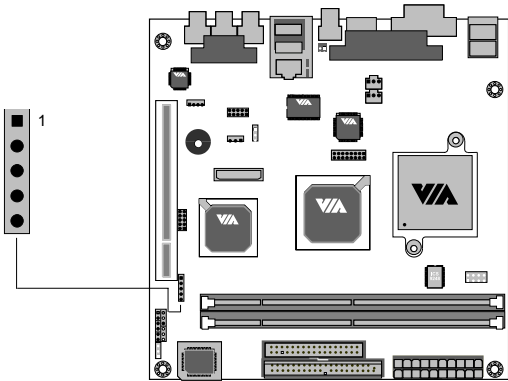


PS2 Connector (J6)

When this connector is not in use, please short pin 3&5, pin 4&6, pin 7&9, and pin 8&10.




Pin Definition			
PIN	SIGNAL	PIN	SIGNAL
1	+5V	2	GND
3	KB_CLK	4	KB_DATA
5	EXT_KBCLK	6	EXT_KBDATA
7	MS_CLK	8	MS_DATA
9	EXT_MSCLK	10	EXT_MSDATA

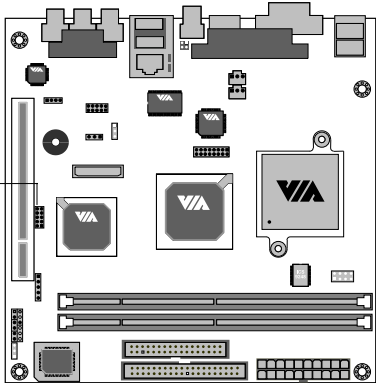


Wake On Modem Connector (J8)

This connector (J8) allows you to connect to a modem with the Wake On Modem function. The connector will power up the system when a signal is received through the modem.

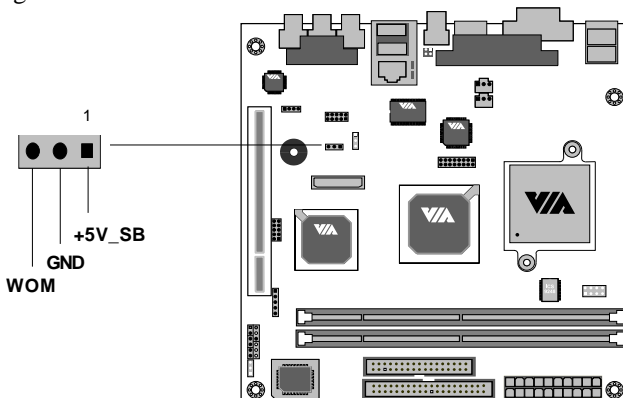

USB Port 2&3 Connector (F_USB)


This connector allows you to connect an additional two Universal Serial Bus (USB) ports, in case the two USB ports on the back panel are not sufficient. To utilize the additional two USB connections, please plug the USB 2-port module onto this pin-header.

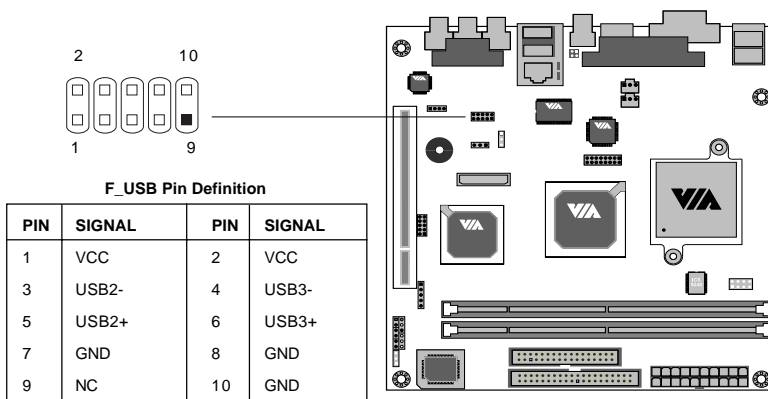

Chapter 2


Video In Connector (J12)

The Video In Connector allows you to connect an external video source.

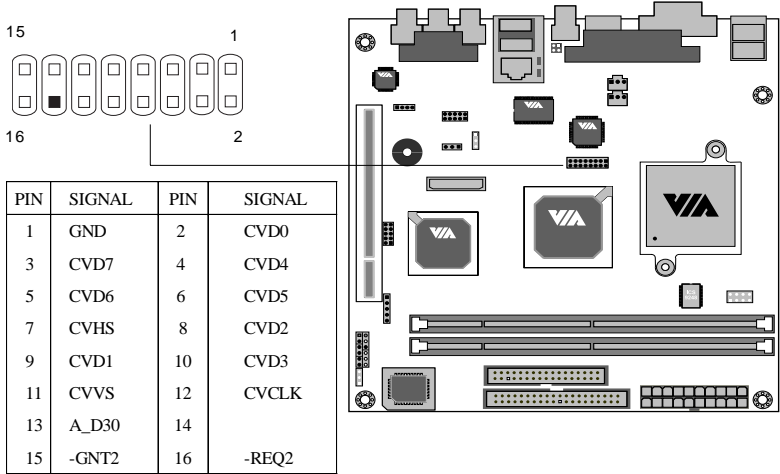

Floppy Disk Drive Connector: FDD

The standard floppy disk drive connector supports 360K, 720K, 1.2M, 1.44M, and 2.88M.

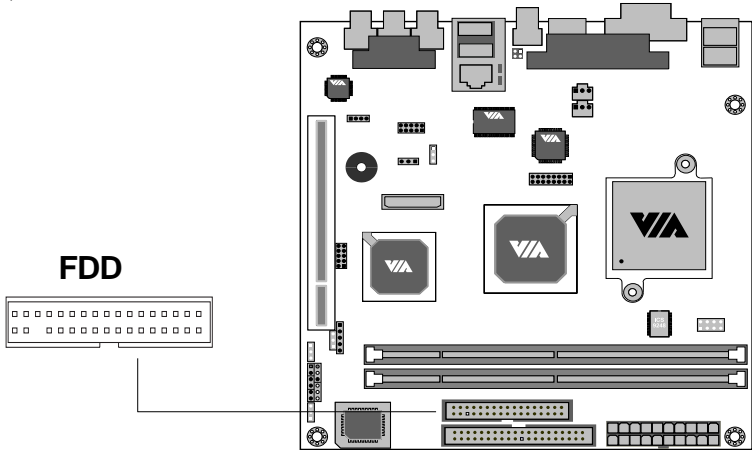


Jumpers

The Mainboard provides a series of jumpers to set the computer's functions. This section explains how to change settings for your mainboard's functions through the use of the jumpers.

Clear CMOS Jumper: CLEAR_CMOS (J10)

The onboard CMOS RAM stores system configuration data and has an onboard battery power supply. The long-life battery has a lifetime of at least 5 years. If you want to clear the system configuration data from the CMOS RAM, use the CLEAR_CMOS (Clear CMOS jumper). Follow the instructions below to clear the data:

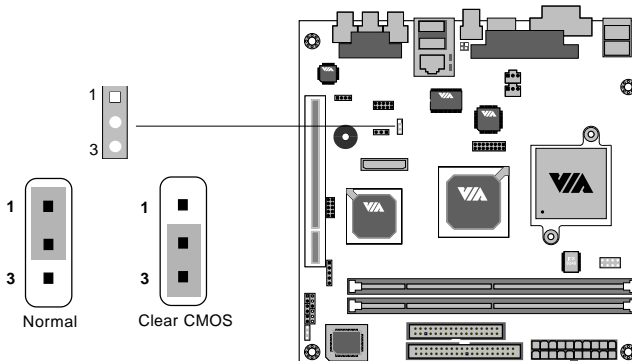

1-2: Normal

2-3: Clear CMOS




WARNING!

You can clear the CMOS by shorting 1-2 pin while the system is off. Then return it to the 2-3 pin position. Avoid clearing the CMOS while the system is on; this will damage the mainboard.

Host Frequency Select (J13)

This jumper can be used to select the host frequency bus speed of the mainboard. The three available options are 66MHz, 100MHz and 133MHz.

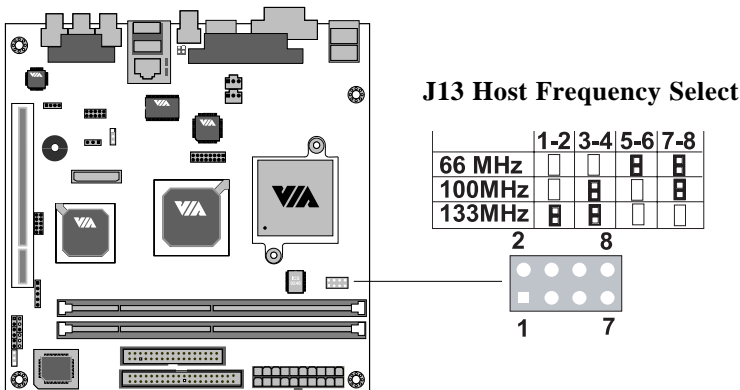


WARNING!

Overclocking

This motherboard is not designed to support overclocking. Any attempt to operate beyond product specifications is not recommended. We do not guarantee the damages or risks caused by operation beyond product specifications.


Auto Reboot Function Setting (J2)

This jumper enables or disables the Auto Reboot Function Setting. When enabled, the system will automatically reboot in the event it of sudden power outage.

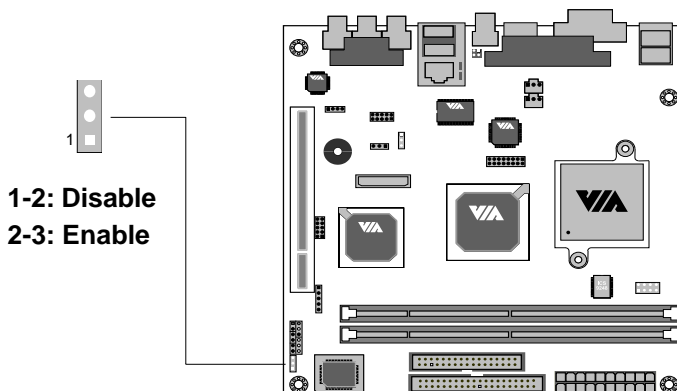

RCA Video or S/PDIF Select (J11)


Users can select either RCA Video or S/PDIF as the enabled function on the dual-purpose port. For TV-out composite function, please short 1-2. For S/PDIF out, short 3-4.

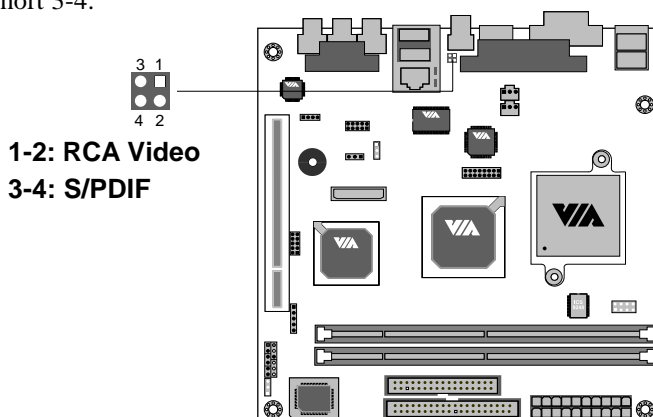

Slots

PCI Slot

The PCI slot allows you to insert PCI expansion card. When adding or removing expansion cards, make sure that you unplug the power supply first. Meanwhile, read the documentation for the expansion card to make any necessary hardware or software settings for the expansion card, such as jumpers, switches or BIOS configuration.

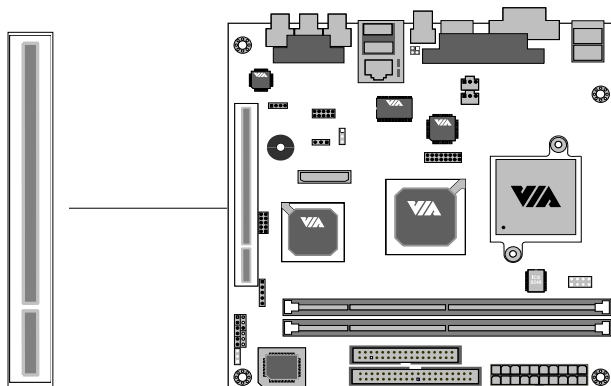

PCI Interrupt Request Routing

PCI Interrupt Request Routing

The IRQ (Interrupt ReQuest) is the mechanism for devices to request services from the microprocessor. The “PCI & LAN” IRQ pins are typically connected to the PCI bus INT A# ~ INT D# pins as follows:

	Order 1	Order 2	Order 3	Order 4
PCI Slot 1	INT B#	INT C#	INT D#	INT A#
LAN	INT B#			

3

BIOS Setup

This chapter gives you detailed explanation of BIOS setup functions. It consists of the following topics:

Entering Setup	3-2
Control Keys	3-2
Getting Help	3-3
The Main Menu	3-4
Standard CMOS Features	3-6
Advanced BIOS Features	3-8
Advanced Chipset Features	3-11
Integrated Peripherals	3-13
Power Management Setup	3-16
PNP/PCI Configurations	3-21
PC Health Status	3-23
Frequency/Voltage Control	3-24
Load Fail-Safe Defaults	3-25
Load Optimized Defaults	3-26
Set Supervisor/User Password	3-27
Save & Exit Setup	3-29
Exit Without Saving	3-30

Entering Setup

Power on the computer and press DEL straight away to enter the BIOS setup menu. If you missed the BIOS setup entry point, you may restart the system and try again.

Control Keys

<↑>	Move to the previous item
<↓>	Move to the next item
<←>	Move to the item in the left hand
<→>	Move to the item in the right hand
<Enter>	Select the item
<Esc>	Jumps to the Exit menu or returns to the main menu from a submenu
<+ /PU>	Increase the numeric value or make changes
<- /PD>	Decrease the numeric value or make changes
<F1>	General help, only for Status Page Setup Menu and Option Page Setup Menu
<F5>	Restore the previous CMOS value from CMOS, only for Option Page Setup Menu
<F6>	Load the default CMOS value from Fail-Safe default table, only for Option Page Setup Menu
<F7>	Load Optimized defaults
<F10>	Save all the CMOS changes and exit

Getting Help


After entering the BIOS setup menu, the Main Menu appears.

Main Menu

The main menu displays all BIOS setup categories. Use the control keys (↓↑) to select any item/sub-menu. Description of the selected/highlighted category is displayed at the bottom of the screen.

Sub-Menu

If you find a right pointer symbol (as shown in the right view) on the left of field, this means a sub-menu is available. The sub-menu contains additional options. You can use control keys (↓↑) to highlight the field and press <Enter> to enter the sub-menu. To return from the sub-menu press <Esc>.




- ▶IDE Primary Master
- ▶IDE Primary Slave
- ▶IDE Secondary Master
- ▶IDE Secondary Slave

General Help <F1>

The BIOS setup program provides a General Help screen. You can call up this screen from any menu/sub-menu by pressing <F1>. The help screen displays the keys for use and navigate the BIOS setup. Press <Esc> to exit the help screen.

The Main Menu

The Main Menu contains twelve setup functions and two exit choices. Use arrow keys to select the items and press <Enter> to accept or enter the sub-menu.

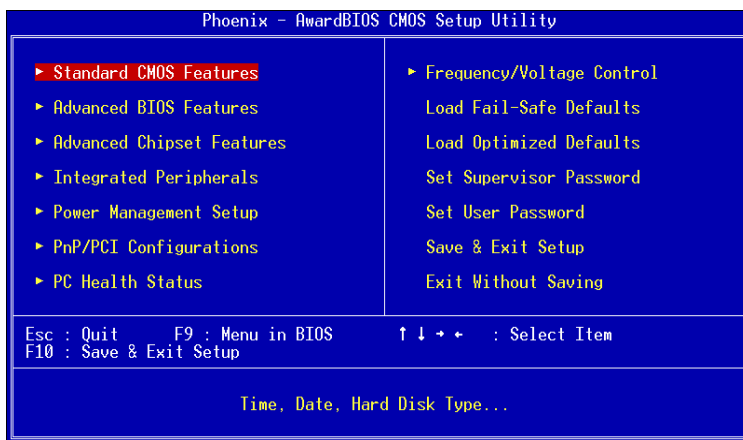

Standard CMOS Features

Use this menu to set basic system configurations.

Advanced BIOS Features

Use this menu to set the advanced features available on your system.

Advanced Chipset Features

Use this menu to set chipset specific features and optimize system performance.

Integrated Peripherals

Use this menu to set onboard peripherals features.

Power Management Setup

Use this menu to set onboard power management functions.

PnP/PCI Configurations

Use this menu to set the PnP and PCI configurations.

PC Health Status

This menu shows the PC health status.

Frequency/Voltage Control

Use this menu to set the system frequency and voltage control.

Load Fail-Safe Defaults

Use this menu to load the BIOS default settings for minimal and stable system operations.

Load Optimized Defaults

Use this menu to load BIOS default settings for optimal and high performance system operations.

Set Supervisor Password

Use this menu to set supervisor password.

Set User Password

Use this menu to set user password.

Save & Exit Setup

Save BIOS setting changes and exit setup.

Exit Without Saving

Abandon all BIOS setting changes and exit setup.

Standard CMOS Features

Use the arrow keys to highlight the item and use the <PgUp> or <PgDn> keys to select the value you desire for each item.

Phoenix - AwardBIOS CMOS Setup Utility Standard CMOS Features		
Date (mm:dd:yy)	Fri, Nov 15 2002	Item Help Menu Level ▶ Change the day, month, year and century
Time (hh:mm:ss)	15 : 45 : 33	
▶ IDE Primary Master		
▶ IDE Primary Slave		
Drive A	[1.44M, 3.5 in.]	
Drive B	[None]	
Halt On	[All , But Keyboard]	
Base Memory	640K	
Extended Memory	65472K	
Total Memory	1024K	
↑←→: Move Enter: Select +/-/PU/PD: Value F10: Save ESC: Exit F1: General Help F5: Previous Values F6: Fail-Safe Defaults F7: Optimized Defaults		

Date

The date format is <Day><Month><Date><Year>.

Day - day of the week, for example Friday. Read-only.

Month - the month from Jan to Dec.

Date - the date from 1 to 31.

Year - the year, range from 1999 to 2098.

Time

The time format is <Hour><Minute><Second>.

Drive A/B

Set the type of floppy drive installed. Available options are *None*, *360K*, *5.25 in.*, *1.2M*, *5.25 in.*, *720K*, *3.5 in.*, *1.44M*, *3.5 in.*, *2.88M*, *3.5 in.*

Halt On

Determine the system behaviour if an error is detected during bootup. Settings:

All Errors System halts when any error is detected.

No Errors System does not halt for any error.


All, But Keyboard System halts for all errors (except keyboard error).

All, But Diskette System halts for all errors (except diskette error).

All, But Disk/Key System halts for all errors (except disk/keyboard error)

IDE Primary Master/Slave

Press <Enter> to enter the sub-menu and the following screen appears:

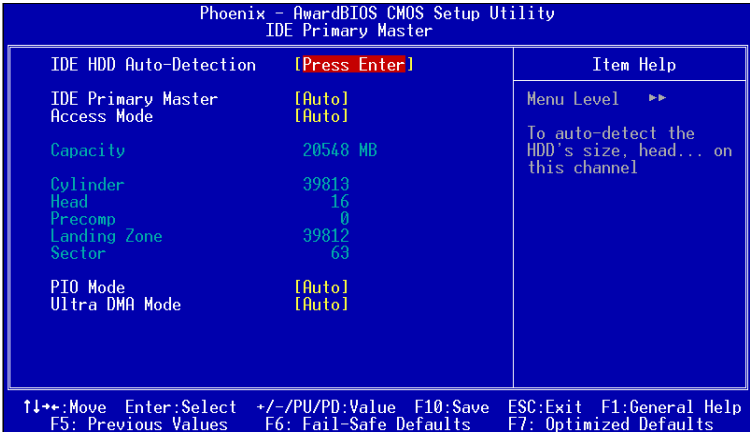

The specifications of your drive must match with the drive table. The hard disk will not work properly if you enter improper information for this category. Select Auto whenever possible. If you select Manual, make sure the information provided is from your hard disk vendor or system manufacturer.

IDE Primary Slave	The settings are None, Auto, Manual.
Access Mode	The settings are CHS, LBA, Large, Auto.
Capacity	The formatted size of the storage device.
Cylinder	Number of cylinders.
Head	Number of heads.
Precomp	Write precompensation.
Landing Zone	Cylinder location of the landing zone.
Sector	Number of sectors.
PIO Mode	The settings are Mode 0/1/2/3/4, Auto.
UltraDMA Mode	The settings are Disabled and Auto.

Advanced BIOS Features

Phoenix - AwardBIOS CMOS Setup Utility		
Advanced BIOS Features		
Virus Warning	[Disabled]	Item Help
CPU L2 Cache ECC Checking	[Enabled]	Menu Level ▶ Allows you to choose the VIRUS warning feature for IDE Hard Disk boot sector protection. If this function is enabled and someone attempt to write data into this area , BIOS will show a warning message on screen and alarm beep
Processor Number Feature	[Enabled]	
Quick Power On Self Test	[Enabled]	
First Boot Device	[Floppy]	
Second Boot Device	[HDD-0]	
Third Boot Device	[LS120]	
Boot Other Device	[Enabled]	
Swap Floppy Drive	[Disabled]	
Boot Up Floppy Seek	[Disabled]	
Boot Up NumLock Status	[On]	
Gate A20 Option	[Normal]	
Typematic Rate Setting	[Enabled]	
Typematic Rate (Chars/Sec)	[30]	
Typematic Delay (Msec)	[250]	
Security Option	[Setup]	
Display Full Screen Logo	[Enabled]	
Show Summary Information	[Disabled]	
Display Small Logo	[Disabled]	
↑↓←→:Move Enter:Select +/=/PU/PD:Value F10:Save ESC:Exit F1:General Help		
F5: Previous Values F6: Fail-Safe Defaults F7: Optimized Defaults		

Virus Warning

Set the Virus Warning feature for IDE Hard Disk boot sector protection. If the function is enabled, any attempt to write data into this area will cause a beep and a warning message will be displayed. Settings: *Disabled* and *Enabled*.

CPU L2 Cache ECC Checking

Set the ECC (Error-Correcting Code) feature for Level 2 cache. Facilitates error detection/correction when data passes through Level 2 cache. Settings: *Enabled* and *Disabled*.

Processor Number Feature

Set the CPU internal serial number. Settings: *Enabled* and *Disabled*.

Quick Power On Self Test

Shorten Power On Self Test (POST) cycle and enable shorter bootup time. Allow BIOS to skip some check items during POST. Settings: *Enabled* and *Disabled*.

First/Second/Third Boot Device

Set the boot device sequence as BIOS attempts to load the disk operating system. The settings are:

<i>Floppy</i>	The system will boot from floppy drive.
<i>LS120</i>	The system will boot from LS-120 drive.
<i>HDD-0</i>	The system will boot from first HDD.
<i>SCSI</i>	The system will boot from SCSI.
<i>CD-ROM</i>	The system will boot from CD-ROM.
<i>HDD-1</i>	The system will boot from second HDD.
<i>HDD-2</i>	The system will boot from third HDD.
<i>HDD-3</i>	The system will boot from fourth HDD.
<i>ZIP100</i>	The system will boot from ATAPI ZIP drive.
<i>USB-FDD</i>	The system will boot from USB floppy drive.
<i>USB-ZIP</i>	The system will boot from USB ZIP drive.
<i>USB-CDROM</i>	The system will boot from USB CDROM.
<i>USB-HDD</i>	The system will boot from USB HDD.
<i>LAN</i>	The system will boot from network drive.
<i>Disabled</i>	Disable this sequence.

Boot Other Device

Enable the system to boot from other devices if the system fails to boot from the First/Second/Third boot device. Settings: *Enabled* and *Disabled*.

Swap Floppy Drive

If the system has two floppy drives, choose enable to assign physical drive B to logical drive A and vice-versa. Settings: *Enabled* and *Disabled*.

Boot Up Floppy Seek

Set floppy seek during POST, BIOS will determine whether the floppy is 40 or 80 tracks. Settings: *Enabled* and *Disabled*.

Boot Up NumLock Status

Set the NumLock status when the system is powered on. “On” will turn key pad into number keys, and “Off” will turn key pad into arrow keys. Settings: *On* and *Off*.

Gate A20 Option

The option, Fast, allows the chipset to control Gate A20, and the Normal option makes a pin in the keyboard controller control Gate A20. Settings: *Fast* and *Normal*.

Chapter 3

Typematic Rate Setting

Set the typematic rate and delay. Settings: *Enabled* and *Disabled*.

Typematic Rate (Chars/Sec)

When Typematic Rate Setting is enabled. This item allows you to set the rate (characters/second) at which the keys are accelerated. Settings: *6, 8, 10, 12, 15, 20, 24* and *30*.

Typematic Delay (Msec)

When Typematic Rate Setting is enabled. This item allows you to select the delay between when the key was first pressed and when the acceleration begins. Settings: *250, 500, 750* and *1000*.

Security Option

Specifies the type of BIOS password protection that is implemented. Settings are described below:

Option	Description
<i>Setup</i>	The password prompt appears only when end users try to run Setup.
<i>System</i>	A password prompt appears every time when the computer is powered on or when end users try to run Setup.

Display Full Screen logo

Show full screen logo during BIOS bootup process. Settings: *Enabled* and *Disabled*.

Show Summary Information


Show summary information during BIOS bootup process. Settings: *Enabled* and *Disabled*.

Display Small Logo

Show small energy star logo during BIOS bootup process. Settings: *Enabled* and *Disabled*.

Advanced Chipset Features

The Advanced Chipset Features menu is used for optimizing the chipset functions.

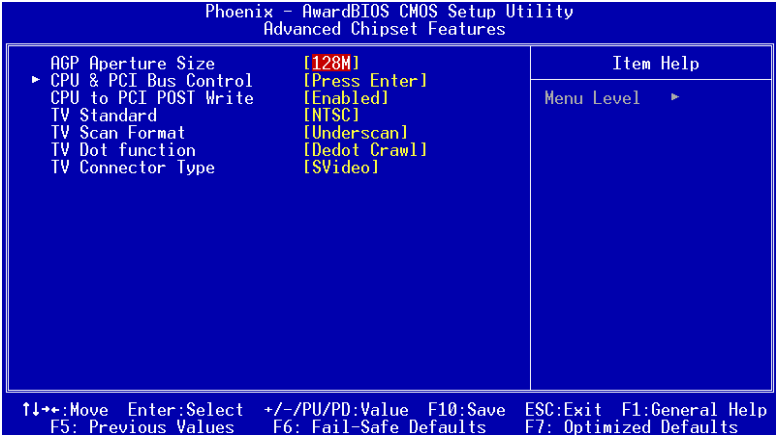


Note: Change these settings only if you are familiar with the chipset.

AGP Aperture Size

This setting controls how much memory space can be allocated to AGP for display purposes. The aperture is a portion of the PCI memory address range dedicated to graphics memory address space. Host cycles that hit the aperture range are forwarded to the AGP without any translation. Settings: 4MB, 8MB, 16MB, 32MB, 64MB, 128MB, and 256MB.

CPU & PCI Bus Control

Press <Enter> to enter the sub-menu and the screen at the next page would appear:

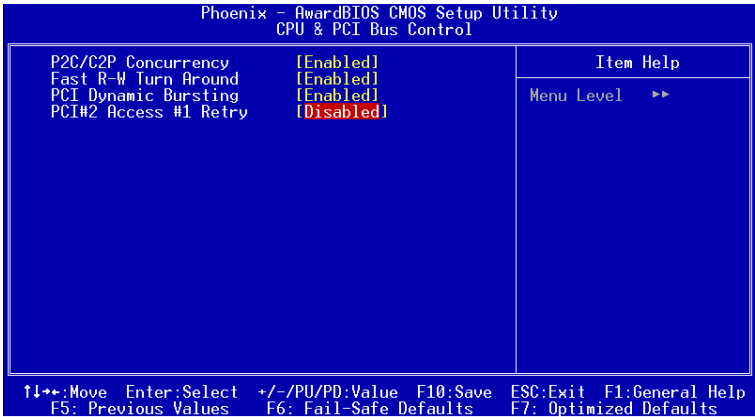

P2C/C2P Concurrency	The settings are Enabled and Disabled.
Fast R-W Turn Around	The settings are Enabled and Disabled.
PCI Dynamic Bursting	The settings are Enabled and Disabled.
PCI#2 Access #1 Retry	The settings are Enabled and Disabled.

CPU to PCI POST Write

When *Enabled*, CPU can write up to four words of data to the PCI write buffer before CPU must wait for PCI bus cycle to finish. If *Disabled*, CPU must wait after each write cycle until PCI bus signals that it is ready to receive more data. Settings: *Enabled* and *Disabled*.

TV Standard

Set the TV standard you want to use for displaying. Settings: *NTSC* and *PAL*.

TV Scan Format

Set the TV scan format you would like to use. Settings: *Underscan* and *Overscan*.

TV Dot Function

Choose TV dot function. Settings: *Dedot Crawl* and *Dot Crawl*.

TV Connector Type

Choose TV connect type. Settings: *SVideo* and *Composite*.

Integrated Peripherals

Phoenix - AwardBIOS CMOS Setup Utility		
Integrated Peripherals		
► VIA SuperIO Device	[Press Enter]	Item Help
Onboard IDE Channel	[Enabled]	Menu Level ►
IDE Prefetch Mode	[Enabled]	
Display Card Priority	[PCI Slot]	
Frame Buffer Size	[8M]	
AC97 Audio	[Auto]	
VIA-3043 OnChip LAN	[Enabled]	
USB Keyboard Support	[Disabled]	
Onboard Parallel Mode	[Normal]	
ECP Mode Use DMA	--	
Parallel Port EPP Type	--	
↑↓←→:Move Enter:Select +/-/PU/PD:Value F10:Save ESC:Exit F1:General Help		
F5: Previous Values F6: Fail-Safe Defaults F7: Optimized Defaults		

Onboard IDE Channel

The integrated peripheral controller contains an IDE interface. Choose *Enabled* to activate the channel. Settings: *Disabled, Enabled*.

IDE Prefetch Mode

This allows your hard disk controller to use the fast block mode to transfer data to and from the hard disk drive. Block mode is also called block transfer, multiple commands or multiple sector read/write. *Enabled* enables IDE controller to use block mode; *Disabled* allows the controller to use standard mode.

Display Card Priority

This setting specifies which VGA card is your primary graphics adapter. Settings: *PCI Slot* and *AGP*.

Frame Buffer Size

Set the Frame Buffer size. Settings: *16M, 32M, and 64M*.

AC97 Audio

Auto allows the mainboard to detect whether an audio device is used. If the device is detected, the onboard VIA AC'97 (Audio Codec'97) controller will be enabled; if not, it is disabled. Disable the controller if you want to use other controller cards to connect an audio device. Setting options: *Auto* and *Disabled*.

VIA-3043 OnChip LAN

Decide whether to invoke the boot ROM of VIA-3043 onchip LAN. Settings: *Enabled* and *Disabled*.

USB Keyboard Support

Enable USB Keyboard Support for DOS and Windows 95. Settings: *Enabled* and *Disabled*.

Onboard Parallel Mode

Set the parallel port mode. To operate the onboard parallel port as Standard Parallel Port, choose "SPP." To operate the onboard parallel port in the EPP mode, choose "EPP." By choosing "ECP", the onboard parallel port will operate in ECP mode. Choosing "ECP + EPP" will allow the onboard parallel port to support both the ECP and EPP modes simultaneously. Settings are:


Normal :	Standard Parallel Port
EPP :	Enhanced Parallel Port
ECP :	Extended Capability Port
ECP + EPP:	Extended Capability Port + Enhanced Parallel Port

ECP Mode Use DMA

ECP utilises a DMA channel. This field is only available if Parallel Port Mode is set to "ECP". Select DMA channel for ECP use.

VIA SuperIO Device

Press <Enter> to enter the sub-menu and the following screen appears:

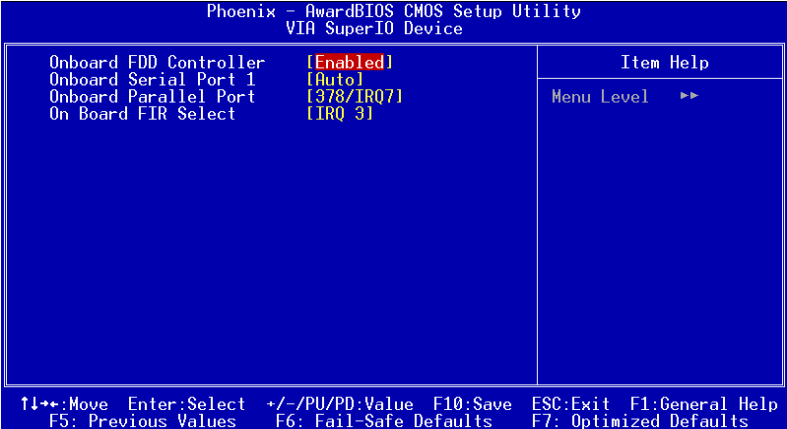

Onboard FDD Controller

Enable the onboard floppy controller. Select “Enabled” when you have installed a floppy disk drive. Settings: *Enabled* and *Disabled*.

Onboard Serial Port 1

Set the base I/O port address and IRQ for the onboard serial port A/serial port B. Selecting *Auto* allows BIOS to automatically determine the correct base I/O port address. Settings: *Disabled*, *3F8/IRQ4*, *2F8/IRQ3*, *3E8/IRQ4*, *2E8/IRQ3* and *Auto*.

Onboard Parallel Port


This specifies the I/O port address and IRQ of the onboard parallel port. Settings: *378/IRQ7*, *278/IRQ5*, *3BC/IRQ7* and *Disabled*.

Onboard FIR Select

Enable onboard fast IR functions. Settings: *IRQ3*, *IRQ 9*, *IRQ 10* and *Disabled*.

Power Management Setup

The Power Management Setup menu configures the system to most effectively save energy while operating in a manner consistent with your own style of computer use.

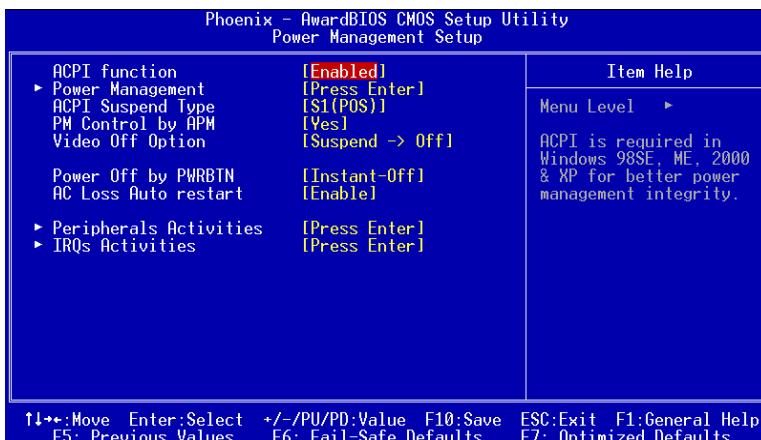


ACPI Function

Activate the ACPI (Advanced Configuration and Power Management Interface) Function. If your operating system is ACPI-aware (i.e. Windows 98/98SE/ME/2000/XP) select Enabled. Settings: *Enabled* and *Disabled*.

Power Management

Press <Enter> to enter the sub-menu and the following screen appears:

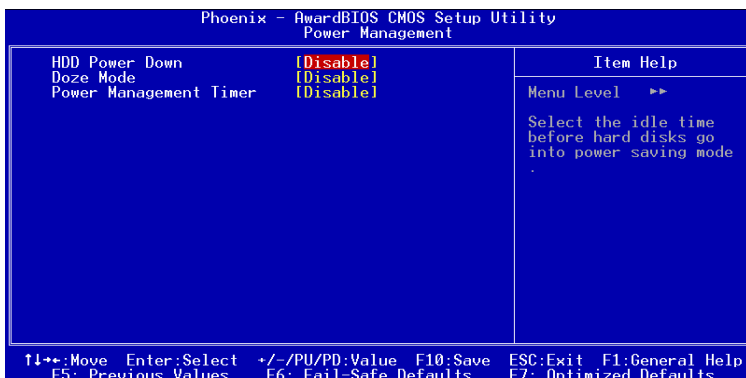

Set the idle time before system enters power saving mode. ACPI OS such as Windows XP will override this option. Settings: *Disable* and *1/2/4/6/8/10/20/30/40 min and 1 hr*.

ACPI Suspend Type

Set the power saving mode for ACPI function. Settings are:

S1/POS - S1/Power On Suspend (POS) is a low power state. In this state, no system context (CPU or chipset) is lost and hardware maintains all system context.

S3/STR - S3/Suspend To RAM (STR) is a power-down state. In this state, power is supplied only to essential components such as main memory and wakeup-capable devices. The system context is saved to main memory, and context is restored from the memory when a "wakeup" event occurs.

S1 & S3 - Depends on OS to select S1 or S3.

PM Control by APM

Set if you want the power management function to be controlled by APM. Settings: *Yes* and *No*.

Video Off Option

Select whether or not to turn off the screen when system enters power saving mode, ACPI OS such as Windows XP will override this option.

Settings are:

Always On - The screen is always on even when system enters power saving mode.

Suspend -> Off - The screen is turned off when system enters power saving mode.

Power Off by PWRBTN

This field configures the power button function. Settings are:

Delay 4 Sec - The system is turned off if power button is pressed for more than four seconds.

Instant-Off - The power button functions as a normal power-on/-off button.

AC Loss Auto Restart

If there happens to be AC power loss when your system is running, this item allows you to choose the power state when the AC power is back.

The <Off> option keeps system in Off state until you press the power button. Settings: *Disable* and *Enable*.

Peripheral Activities

Press <Enter> to enter the sub-menu and the following screen appears:

Phoenix - AwardBIOS CMOS Setup Utility		
Peripherals Activities		
VGA Event	[OFF]	Item Help
LPT & COM Event	[LPT/COM]	Menu Level ►► Decide whether or not the power management unit should monitor VGA activities.
HDD & FDD Event	[ON]	
PCI Master Event	[OFF]	
PS2KB Wakeup Select	[Hot key]	
PS2KB Wakeup from suspend	[Disable]	
USB Resume	[Disabled]	
PowerOn by PCI Card	[Disabled]	
Modem Ring Resume	[Disabled]	
RTC Alarm Resume	[Disabled]	
Date (of Month)	--	
Resume Time (hh:mm:ss)	--:--:--	
↑↓←→:Move Enter:Select +/-/PU/PD:Value F10:Save ESC:Exit F1:General Help		
F5: Previous Values F6: Fail-Safe Defaults F7: Optimized Defaults		

VGAEvent

Decide whether or not the power management unit should monitor VGA activities. Settings: *Off* and *On*.

LPT & COMEvent

Decide whether or not the power management unit should monitor parallel port (LPT) and serial port (COM) activities. Settings: *None*, *LPT*, *COM* and *LPT/COM*.

HDD & FDD Event

Decide whether or not the power management unit should monitor hard disks and floppy drives activities. Settings: *Off* and *On*.

PCI Master Event

Decide whether or not the power management unit should monitor PCI master activities. Settings: *Off* and *On*.

PS2KB Wakeup Select

When Select Password, Please press ENTER key to change Password, Max 8 characters. Settings: *Password* and *Hot key*.

PS2KB Wakeup from suspend

Select which “Hot-Key” is used to wake-up the system from power saving mode. Settings: *Disabled*, *Ctrl+F1*, *Ctrl+F2*, *Ctrl+F3*, *Ctrl+F4*, *Ctrl+F5*, *Ctrl+F6*, *Ctrl+F7*, *Ctrl+F8*, *Ctrl+F9*, *Ctrl+F10*, *Ctrl+F11*, *Ctrl+F12*, *Power*, *Wake* and *Any Key*.

USB Resume

Decide whether or not the USB devices can wake the system from suspend state. Settings: *Disabled* and *Enabled*.

PowerOn by PCI Card

Decide whether or not a PCI card can power up the system or resume it from suspend state. Such PCI cards include LAN, onboard USB ports, etc. Settings: *Disabled* and *Enabled*.

Modem Ring Resume

Decide whether or not Ring-In signals from Modem can wake up the system from suspend state. Settings: *Disabled* and *Enabled*.

RTC Alarm Resume

The field is used to enable or disable the feature of booting up the system on a scheduled time/date. Settings: *Disabled* and *Enabled*.

Date(ofMonth)

The field specifies the date for *RTC Alarm Resume*. Settings: 0~31.

Resume Time (hh:mm:ss)

The field specifies the time for *RTC Alarm Resume*. Format is <hour><minute><second>.

IRQs Activities

Press <Enter> to enter the sub-menu and the following screen appears:

Phoenix - AwardBIOS CMOS Setup Utility			
IRQs Activities			
Primary INTR	[ON]	Item Help	
IRQ3 (COM 2)	[Disabled]	Menu Level ▶▶ If you choose Disabled , the power management unit will not monitor any IRQ activities.	
IRQ4 (COM 1)	[Enabled]		
IRQ5 (LPT 2)	[Enabled]		
IRQ6 (Floppy Disk)	[Enabled]		
IRQ7 (LPT 1)	[Enabled]		
IRQ8 (RTC Alarm)	[Disabled]		
IRQ9 (IRQ2 Redir)	[Disabled]		
IRQ10 (Reserved)	[Disabled]		
IRQ11 (Reserved)	[Disabled]		
IRQ12 (PS/2 Mouse)	[Enabled]		
IRQ13 (Coprocessor)	[Enabled]		
IRQ14 (Hard Disk)	[Enabled]		
IRQ15 (Reserved)	[Disabled]		
↑↓←→: Move Enter: Select +/-/PU/PD: Value F10: Save ESC: Exit F1: General Help			
F5: Previous Values F6: Fail-Safe Defaults F7: Optimized Defaults			

Primary INTR

Selecting *ON* will cause the system to wake up from power saving modes if activity is detected from any enabled IRQ channels. Settings: *OFF* and *ON*.

IRQ3-IRQ15

Enables or disables the monitoring of the specified IRQ line. If set to *Enabled*, the activity of the specified IRQ line will prevent the system from entering power saving modes or awaken it from power saving modes. Settings: *Disabled* and *Enabled*.

Note: *IRQ (Interrupt Request) lines are system resources allocated to I/O devices. When an I/O device needs to gain attention of the operating system, it signals this by causing an IRQ to occur. After receiving the signal, when the operating system is ready, the system will interrupt itself and perform the service required by the IO device.*

PNP/PCI Configurations

This section describes the BIOS configuration of the PCI bus system. This section covers some very technical items and it is strongly recommended that only experienced users should make any changes to the default settings.

Phoenix - AwardBIOS CMOS Setup Utility		
PnP/PCI Configurations		
PNP OS Installed	[No]	Item Help Menu Level ▶ Select Yes if you are using a Plug and Play capable operating system. Select No if you need the BIOS to configure non-boot devices.
Reset Configuration Data	[Disabled]	
Resources Controlled By	[Auto(ESCD)]	
IRQ Resources	---	
Assign IRQ For VGA	[Enabled]	
↑↓←→:Move Enter:Select +/-/PU/PD:Value F10:Save ESC:Exit F1:General Help		
F5: Previous Values F6: Fail-Safe Defaults F7: Optimized Defaults		

PNP OS Installed

When set to *Yes*, BIOS will only initialize the PnP cards used for booting (VGA, IDE, SCSI). Other cards will be initialized by the PnP operating system like Windows® 95 or 98/98SE. When set to *No*, BIOS will initialize all the PnP cards. Set to *Yes* the operating system is Plug & Play capable. The settings: *No* and *Yes*.

Reset Configuration Data

Normally, you leave this field Disabled. Select Enabled to reset Extended System Configuration Data (ESCD) when you exit Setup if you have installed a new add-on and the system reconfiguration has caused such a serious conflict that the operating system can not boot. The settings: *Enabled* and *Disabled*.

Resource Controlled By

The BIOS can automatically configure all the boot and Plug and Play compatible devices. Choose “Auto(ESCD)” if unsure, the BIOS will automatically assign IRQ, DMA and memory base address fields. The settings: *Auto (ESCD)* and *Manual*.

IRQ Resources

The items are adjustable only when *Resources Controlled By* is set to *Manual*. Press <Enter> and you will enter the sub-menu of the items.

Phoenix - AwardBIOS CMOS Setup Utility			Item Help
IRQ Resources			
IRQ-3	assigned to	[PCI Device]	Menu Level ►► Legacy ISA for devices compliant with the original PC AT bus specification, PCI/ISA PnP for devices compliant with the Plug and Play standard whether designed for PCI or ISA bus architecture
IRQ-4	assigned to	[PCI Device]	
IRQ-5	assigned to	[PCI Device]	
IRQ-7	assigned to	[PCI Device]	
IRQ-9	assigned to	[PCI Device]	
IRQ-10	assigned to	[PCI Device]	
IRQ-11	assigned to	[PCI Device]	
IRQ-12	assigned to	[PCI Device]	
IRQ-14	assigned to	[PCI Device]	
IRQ-15	assigned to	[PCI Device]	
↑↓: Move Enter: Select +/-/PU/PD: Value F10: Save ESC: Exit F1: General Help F5: Previous Values F6: Fail-Safe Defaults F7: Optimized Defaults			

IRQ Resources list IRQ 3/4/5/7/9/10/11/12/14/15 for users to set each IRQ a type depending on the type of device using the IRQ. Settings:

PCI Device For Plug & Play compatible devices designed for PCI bus architecture.

Reserved The IRQ will be reserved for further request.

Assign IRQ For VGA

Assign IRQ for VGA. Settings: *Disabled* and *Enabled*.

PC Health Status


This section shows the status of your CPU, fan, warning for overall system status.

Phoenix - AwardBIOS CMOS Setup Utility	
PC Health Status	
Current CPU Temp	Item Help
System Fan Speed	Menu Level ▶
CPU Fan Speed	
+5V	
CPU Vcore	
3.3V	
+12V	
↑↓←→:Move Enter:Select +/-/PU/PD:Value F10:Save ESC:Exit F1:General Help	
F5: Previous Values F6: Fail-Safe Defaults F7: Optimized Defaults	

Current CPU Temp, CPU Fan Speed, System Fan Speed, +12V, +5V, +3.3V, CPU Vcore.

These items display the current status of all of the monitored hardware devices/components such as CPU voltages, temperatures and all fans' speeds.

Frequency/Voltage Control

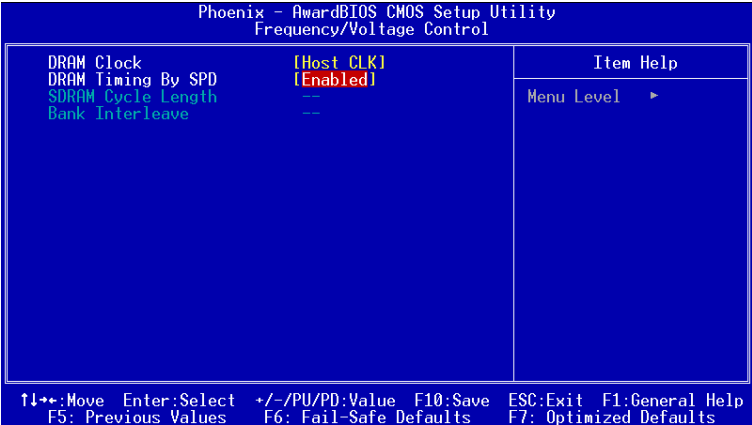

DRAM Clock

The chipset supports synchronous and asynchronous mode between host clock and DRAM clock frequency. Settings: *Host CLK*, *HCLK-33M*, *HCLK+33M*, and *By Auto*.

DRAM Timing By SPD

This setting determines whether DRAM timing is configured by reading the contents of the SPD (Serial Presence Detect) EPROM on the DRAM module. Selecting Yes makes SDRAM Cycle Length and Bank Interleave automatically determined by BIOS according to the configurations on the SPD. Settings: *Disabled* and *Enabled*.

SDRAM Cycle Length

Set the time between SDRAM read command and when the data actually becomes available.


Bank Interleave

Set the interleave mode of the SDRAM interface. Interleaving allows banks of SDRAM to alternate their refresh and access cycles. One bank will undergo its refresh cycle while another is being accessed. This improves performance of the SDRAM by masking the refresh time of each bank.

Load Fail-Safe Defaults

This option on the main menu allows users to restore all the BIOS settings to the default Fail Safe values. These values are set by the mainboard manufacturer to provide the most stable system.

When you select Load-Fail Safe Defaults, a message as below appears:

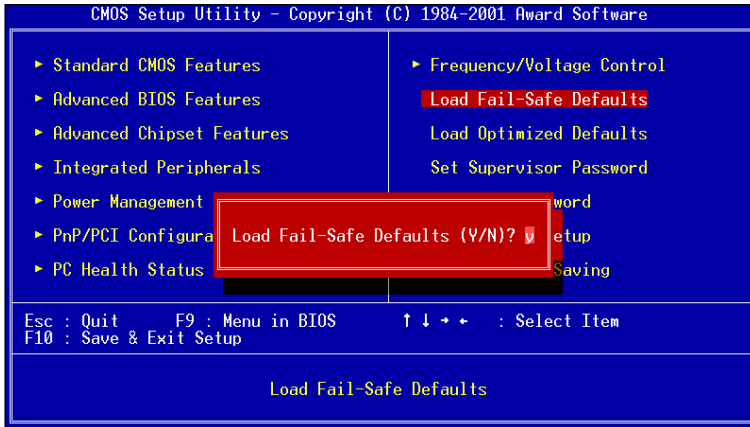


Pressing 'Y' loads the default BIOS values that provide a minimal and stable system configuration.

Load Optimized Defaults

This option on the main menu allows users to restore all the BIOS settings to the default Optimized values. The Optimized Defaults are the default values also set by the mainboard manufacturer for both optimized and stable performance of the mainboard.


When you select Load Optimized Defaults, a message as below appears:

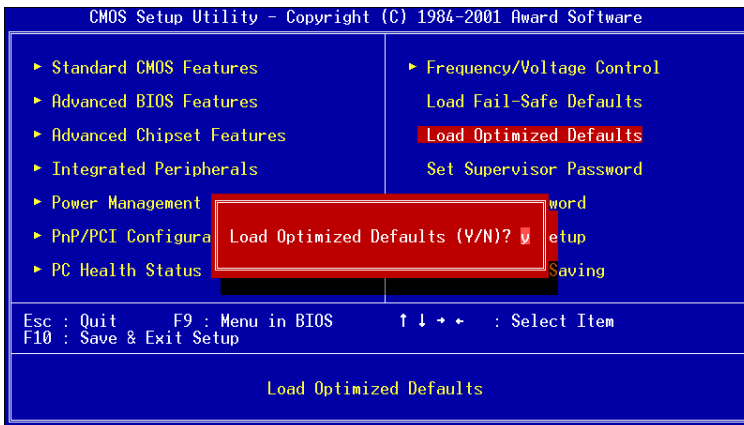

Pressing 'Y' loads the default values that are factory settings for optimal and stable system performance.

Set Supervisor/User Password

When you select this function, a message as below will appear on the screen:

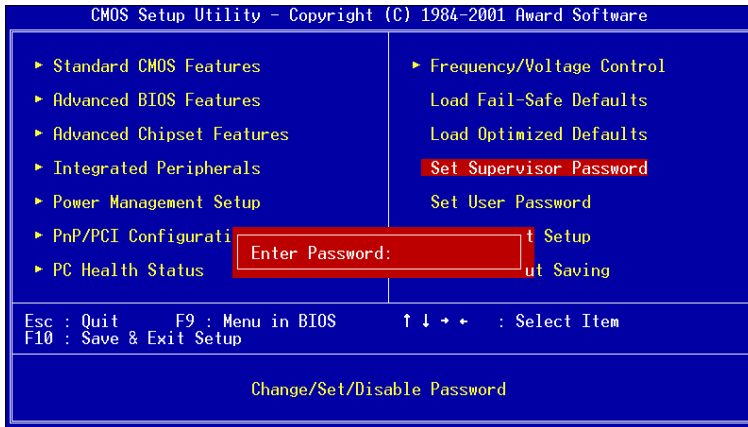

Type the password, up to eight characters in length, and press <Enter>. The password typed now will clear any previously set password from CMOS memory. You will be prompted to confirm the password. Re-type the password and press <Enter>. You may also press <Esc> to abort the selection and not enter a password.

To clear a set password, just press <Enter> when you are prompted to enter the password. A message will show up confirming that the password will be disabled. Once the password is disabled, the system will boot and you can enter Setup without entering any password.

When a password has been set, you will be prompted to enter it every time you try to enter Setup. This prevents an unauthorized person from changing any part of your system configuration.

Additionally, when a password is enabled, you can also have BIOS to request a password each time the system is booted. This would prevent unauthorized use of your computer. The setting to determine when the password prompt is required is the Security Option of the Advanced BIOS Features menu. If the Security Option is set to *System*, the password is required both at boot and at entry to Setup. If set to *Setup*, password prompt only occurs when trying to enter Setup.


About Supervisor Password & User Password:

Supervisor password : Can enter and change the settings of the setup menus.

User password: Can only enter but do not have the right to change the settings of the setup menus.

Save & Exit Setup

When you want to quit the Setup menu, you can select this option to save the changes and quit. A message as below will appear on the screen:

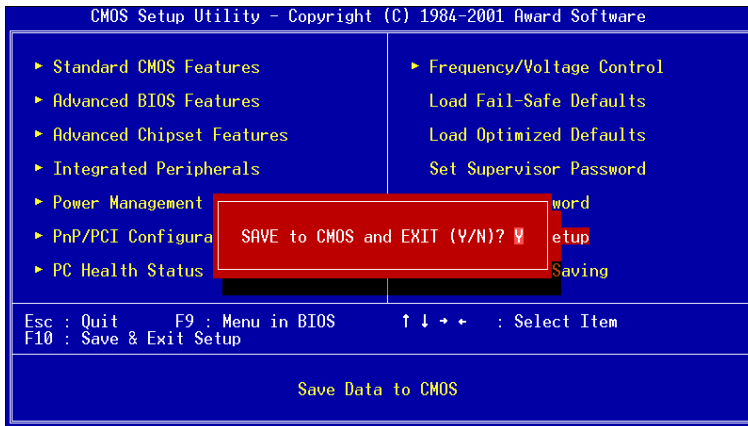


Typing “Y” will allow you to quit the Setup Utility and save the user setup changes to RTC CMOS.

Typing “N” will return to the Setup Utility.

Exit Without Saving

When you want to quit the Setup menu, you can select this option to abandon the changes. A message as below will appear on the screen:

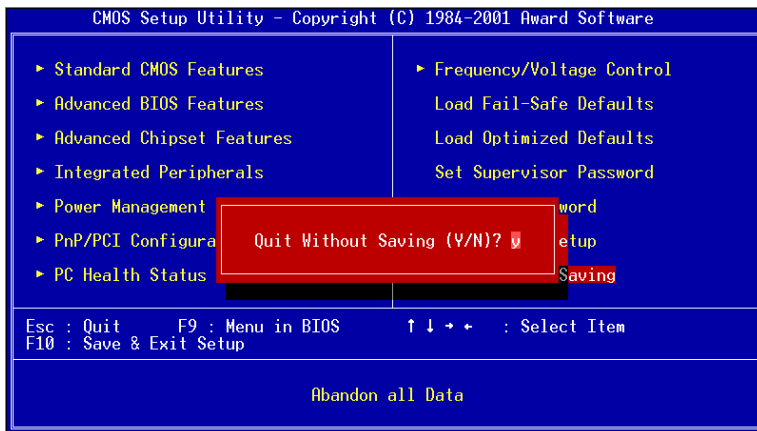

Typing “Y” will allow you to quit the Setup Utility without saving any changes to RTC CMOS.

Typing “N” will return to the Setup Utility.

4

Software Setup

This chapter gives you brief descriptions of each mainboard drivers and applications. It consists of the following topic:

Driver Utilities CD Content	4-2
-----------------------------	-----

Note: You must install VIA chipset drivers first before installing other drivers such as audio or VGA drivers. The applications will only function correctly if the necessary drivers are already installed.

Driver Utilities CD Content

Getting Started

The VIA EPIA-V mainboard includes a Driver Utilities CD which contains driver utilities and software to enhance the performance of the mainboard. Please check that you have this CD in your gift box. If the CD is missing in your gift box, please contact your local dealer for the CD.

Note: The driver utilities and software are updated from time to time. Please visit VIA's website (<http://www.viamainboard.com/>) for the latest updated driver utilities and software.

Running the Driver Utilities CD

To start using the CD, just simply insert the CD into your local CD-ROM or DVD-ROM drive. The CD should run automatically when you close your CD-ROM or DVD-ROM drive. The driver utilities and software menu screen should then appear on your desktop. If the CD does not run automatically, you can run the CD manually by typing "D:\Setup.exe" at Start\Run.

(Please note that D: might not be your CD-ROM/DVD-ROM drive's letter. Make sure you type the correct letter of CD-ROM/DVD-ROM drive on your system).

CD Content

Upon running the CD, the following driver utilities and software menu screen appears as follow:

The driver utilities and software in this CD are:

- **VIA 4in1 Drivers:** Contains VIA ATAPI Vendor Support Driver (enables the performance enhancing bus mastering functions on ATA-capable Hard Disk Drives and ensures IDE device compatibility), AGP VxD Driver (provides service routines to your VGA driver and interface directly to hardware, providing fast graphical access), IRQ Routing Miniport Driver (sets the system's PCI IRQ routing sequence) and VIA INF Driver (enables the VIA Power Management function).
- **VIA Graphics Driver:** Enhance the onboard VIA graphic chip.
- **VIA Audio Driver:** Enhance the onboard VIA audio chip.
- **VIA LAN Driver:** Enhance the onboard VIA LAN chip.
- **VIA FIR Driver:** Support for FIR.