

VIA
ALTA DS 3

High-performance Edge AI system with dual 4K screen support and rich wireless and I/O connectivity options



Features


- Qualcomm® APQ8096SG Embedded Processor
- Supports dual 4K display resolution
- Features Qualcomm® Neural Processing SDK support
- Wi-Fi & Bluetooth 4.1 or 4G LTE wireless connectivity options
- Dual display mirror & independent video playback modes available

Specifications


Model Name	ALTA DS 3
Processor	Qualcomm® APQ8096SG Embedded Processor - Two high-performance Kryo cores up to 2.342GHz - Two low power Kryo cores up to 1.593GHz
System Memory	4GB POP LPDDR4 RAM
Storage	16GB eMMC flash memory M.2 slot for M.2 2280 NVMe SSD (PCIe 1 Lane) SD card slot
Graphics	Qualcomm® Adreno™ 530 GPU 3D graphics accelerator with 64-bit addressing 624MHz Graphics engine supporting OpenGL ES 3.1/GEP, GL4.4, DX11.3/4, OpenCL 2.0, Renderscript-Next Supports H.264, H.265 (HEVC 8/10-bit) video decoding up to: 4K@60fps
Trusted Platform Module	TPM1.2 : ST33TPM1212C
Wireless Connectivity	NFA324A-12H32 QCA6174A-1 Wi-Fi 802.11a/b/g/n/ac + BT 4.1 combo LGA module with antenna connector (optional)
Audio	WCD9335 Audio Codec
HDMI	Integrated HDMI 2.0 transmitter and dual DSI to HDMI 1.4 converter
Expansion I/O	1 miniPCIe slot (USB only) 1 M.2 slot 1 SIM card slot
Front Panel I/O	2 USB 3.0 ports 1 SD card slot 2 Audio jacks: Line-out and Mic-in 1 Power Button with blue power LED
Back Panel I/O	2 HDMI ports 1 USB 3.0 port 1 Mini USB 2.0 port (fastboot mode only) 1 Gigabit Ethernet port 1 Antenna hole 1 DC-in jack 1 Kensington lock
Power Supply	12V DC-in
Operating System	Android 8.0
Operating Temperature	0°C ~ 40°C
Operating Humidity	0% ~ 95% @ 40°C (non-condensing)
Storage Temperature	-20°C~ 70°C
Mechanical Construction	Plastic frame Metal bracket
Mounting	Stand holder, VESA mount (optional)
Dimensions	175mm(W) x 25mm(H) x 118mm(D) (6.88" x 0.98" x 4.64")
Weight	0.61kg (1.34lbs)
Compliance	BSMI, CE, FCC



Front Panel External I/O

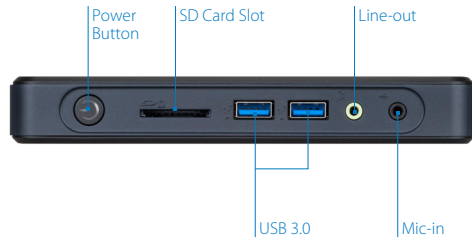

Back Panel External I/O

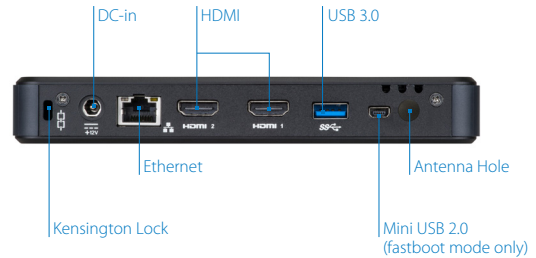

Ordering Information

Part Number	SoC Frequency	Description
ALTADS30VA001-T (US Only)	Qualcomm® APQ8096SG Embedded Processor @ 2.342GHz/1.593GHz	Android system with 2.342GHz Qualcomm® APQ8096SG Embedded Processor, 16GB eMMC, 4GB POP LPDDR4 RAM, 2 HDMI, 3 USB 3.0, Mini USB 2.0, Gigabit Ethernet, Wi-Fi, Bluetooth 4.1, SD card slot, M.2 slot, SIM card slot, miniPCIe slot, Stand holder, US power cord, 12V DC-in
ALTADS30VA002-T	Qualcomm® APQ8096SG Embedded Processor @ 2.342GHz/1.593GHz	Android system with 2.342GHz Qualcomm® APQ8096SG Embedded Processor, 16GB eMMC, 4GB POP LPDDR4 RAM, 2 HDMI, 3 USB 3.0, Mini USB 2.0, Gigabit Ethernet, SD card slot, M.2 slot, SIM card slot, miniPCIe slot, Stand holder, US power cord, 12V DC-in

Optional Accessories

Wireless Accessories

Part Number	Description
EMIO-2573-00A0	Quectel EC25-A 4G/LTE mobile broadband full-size miniPCIe module for USA with assembly kit and antenna pack


Mounting Options

Part Number	Description
VT6076-C0000A1	VESA mount cradle

Cable Accessories

Part Number	Description
99G33-080297	Debug cable (TX/RX)

Dimensions

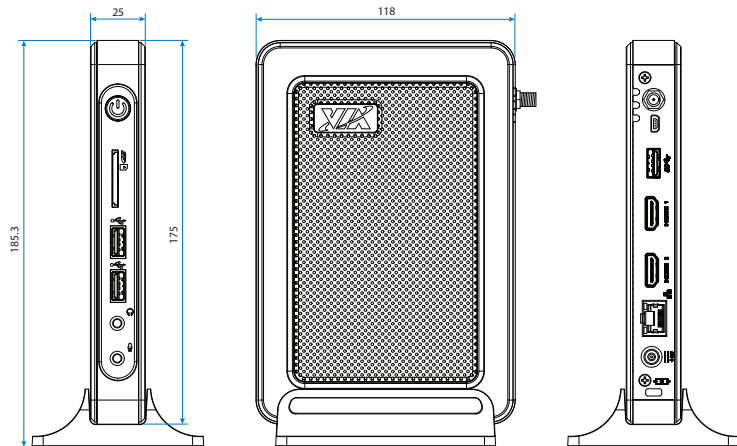

Unit: mm

Packing List

Items
ALTA DS 3 system
Stand holder
AC-to-DC adapter
USA Power cord
Wi-Fi antenna (ALTADS30VA001-T sku only)



* All product specifications are subject to change without notice. Update: Aug. 25, 2020.

www.viatech.com