



USER MANUAL

VIA Mobile360 M800

Reliable and ultra-compact video telematics
system for driver assistance and monitoring



Copyright

Copyright © 2021 VIA Technologies Incorporated. All rights reserved.

No part of this document may be reproduced, transmitted, transcribed, stored in a retrieval system, or translated into any language, in any form or by any means, electronic, mechanical, magnetic, optical, chemical, manual or otherwise without the prior written permission of VIA Technologies, Incorporated.

Trademarks

All trademarks are the property of their respective holders.

Disclaimer

No license is granted, implied or otherwise, under any patent or patent rights of VIA Technologies. VIA Technologies makes no warranties, implied or otherwise, in regard to this document and to the products described in this document. The information provided in this document is believed to be accurate and reliable as of the publication date of this document. However, VIA Technologies assumes no responsibility for the use or misuse of the information (including use or connection of extra device/equipment/add-on card) in this document and for any patent infringements that may arise from the use of this document. The information and product specifications within this document are subject to change at any time, without notice and without obligation to notify any person of such change.

VIA Technologies, Inc. reserves the right the make changes to the products described in this manual at any time without prior notice.

Regulatory Compliance

FCC-A Radio Frequency Interference Statement

This equipment has been tested and found to comply with the limits for a class A digital device, pursuant to part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference, in which case the user will be required to correct the interference at his personal expense.

Notice 1

The changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Notice 2

Shielded interface cables and A.C. power cord, if any, must be used in order to comply with the emission limits.

Notice 3

The product described in this document is designed for general use, VIA Technologies assumes no responsibility for the conflicts or damages arising from incompatibility of the product. Check compatibility issue with your local sales representatives before placing an order.



Tested To Comply
With FCC Standards
FOR HOME OR OFFICE USE



Safety Precautions

- Always read the safety instructions carefully.
- Keep this User's Manual for future reference.
- All cautions and warnings on the equipment should be noted.
- Keep this equipment away from humidity.
- Put this equipment on a reliable flat surface before setting it up.
- If connecting to a vehicle power source check the voltage of the power source provides 9~36V before connecting.
- If connecting to an indoor power source, check the voltage of the power source and adjust to 110/220V before connecting the equipment to the power outlet.
- Do not place the power cord where people will step on it.
- Always unplug the power cord before inserting any add-on card or module.
- If any of the following situations arise, get the equipment checked by authorized service personnel:
 - The power cord or plug is damaged.
 - Liquid has entered into the equipment.
 - The equipment has been exposed to moisture.
 - The equipment is faulty or you cannot get it work according to User's Manual.
 - The equipment has been dropped and damaged.
 - The equipment has an obvious sign of breakage.
- Do not leave this equipment in extreme temperatures or in a storage temperature above 70°C (158°F). The equipment may be damaged.
- Do not leave this equipment in direct sunlight.
- Never pour any liquid into the opening. Liquid can cause damage or electrical shock.
- Do not place anything over the power cord.
- Do not cover the ventilation holes. The openings on the enclosure protect the equipment from overheating.

Packing List

- VIA Mobile360 M800 system
- FOV 60.8° Front ADAS AHD camera with mounting bracket and 3M tape and screw pack (3m cable)
- FOV 113° DMS AHD camera with mounting bracket, 3M tape and screw pack (3m cable)
- 9~36V J1939 and ACC/IGN power cable (3m cable)
- ACC bullet plug to Standard, Micro, Low-Profile and Mini blade fuse holder cable and fuses
- Front panel cover with rubber seal, screw pack and Allen wrench
- Wi-Fi/GPS antenna module (3m cable)
- I/O port caps for ANT-D and ANT-M antenna, DIO, CAN/COM, CAM3 and LAN ports
- 32 GB MicroSD card
- 2 x Vibration dampening strips
- 4 x M5 25mm Molly bolts



Ordering Information

Part Number	Description
M360-M800-6D1A20	Fanless mobile system with 1.2 GHz ARM Cortex-A7 dual-core SoC, 1 GB DDR3 SDRAM, DIO, CAN/COM, Display-out (for ADAS display), 10/100 Mbps Ethernet, 3 AHD camera-in, Wi-Fi, Bluetooth 5.0, GPS, Micro SIM card slot, MicroSD card slot and 9 ~ 36V DC-in with ACC/IGN

Optional Accessories

Display Option

Part Number	Description
M800-DISP-00A0	ADAS Display with speaker, microphone array, multi-function button, 3M tape and mounting screw pack

Wireless Module Options

Part Number	Description
M360-LTE3-Q1APA1	4G LTE mobile broadband full-sized miniPCle module for APAC region with antenna puck, thermal pad and screw pack
M360-LTE3-Q2CNA1	4G LTE mobile broadband full-sized miniPCle module for CN region with antenna puck, thermal pad and screw pack
M360-LTE3-Q1EUA1	4G LTE mobile broadband full-sized miniPCle module for EU region with antenna puck, thermal pad and screw pack
M360-LTE3-Q1JPA1	4G LTE mobile broadband full-sized miniPCle module for JP region with antenna puck, thermal pad and screw pack
M360-LTE3-Q1USA1	4G LTE mobile broadband full-sized miniPCle module for US region with antenna, thermal pad and screw pack

Cable Options

Part Number	Description
M360-M800-2C00A0	M12 5-pin power connector, CAN bus-to-OBD II connector and ACC-to-bullet plug cable
M360-M800-3C00A0	M12 8-pin connector-to-female Ethernet connector cable
M360-MX00-2C00A0	M12 8-pin connector to 12V DC-out, CAN Bus and RS-232 connector cable (supports TX/RX for RS-232)

Development Option

Part Number	Description
M360-M800-1D00A0	Debug board, M12 12-pin connector to debug board cable and M12 5-pin connector to ACC On/Off switch, 9 ~36V DC-in jack and CAN bus connector cable

Calibration Pattern

Part Number	Description
99G51-030031	Vertical ADAS pattern (100cm x 40cm) for LDW/FCW calibration

Table of Contents

1.	Product Overview	1
1.1	Key Features.....	1
1.1.1	High Performance in a Compact and Rugged Chassis.....	1
1.1.2	Multiple I/O Options.....	1
1.1.3	Networking Support	1
1.1.4	1080p Driver Assistance and Monitoring Cameras.....	1
1.1.5	Cloud Integration	1
1.1.6	Support for System-to-Server Deployments	2
1.1.7	Customization	2
1.2	Product Specifications.....	3
1.3	System Layout	5
1.4	System Dimensions	6
2.	External I/O Pin Descriptions and Functionality	7
2.1	MicroSD Card Slot	7
2.2	Micro SIM Card Slot	7
2.3	DISP Port	8
2.4	CAN/COM Port.....	8
2.5	DIO Port	9
2.6	LAN Port.....	9
2.7	CAM Port.....	10
2.8	PWR/CAN Port	10
2.9	Antenna Connectors	11
3.	Hardware Installation	12
3.1	Inserting a MicroSD Card	12
3.2	Securing the Waterproof Cover	13
3.3	Applying the Vibration Dampening Strips.....	14
3.4	VIA Mobile360 M800 System Installation	15
3.5	Wi-Fi/BT/GPS Antenna Installation	15
3.6	Front ADAS Camera Installation	17
3.7	DMS Camera Installation.....	19
3.8	Installing the J1939 Power Cable	22
3.9	Placing the Caps on Unused I/O Ports	25
3.10	Powering System ON/OFF	25
3.10.1	System Reset.....	26
4.	Technical Support and Assistance.....	27
Appendix A	Securing Port Connections with LOCTITE 243 Threadlocker.....	28
Appendix B	Optional Accessories	29
B.1	ADAS Display	29
B.1.1	LED Panel	30
B.1.2	Installing the ADAS Display	32
B.2	4G LTE Wireless Module Kit	33
B.3	OBD II Power Cable	38
B.4	Ethernet Cable	41



B.5	CAN Bus/RS-232 Cable	42
B.6	Development Kit	44

List of Figures

Figure 01: Front panel external I/O layout	5
Figure 02: Rear panel external I/O layout	5
Figure 03: Bottom panel external I/O layout.....	6
Figure 04: System dimensions	6
Figure 05: MicroSD card slot diagram	7
Figure 06: Micro SIM card slot diagram	7
Figure 07: DISP port diagram	8
Figure 08: CAN/COM port diagram	8
Figure 09: DIO port diagram.....	9
Figure 10: LAN port diagram	9
Figure 11: CAM port diagram	10
Figure 12: PWR/CAN port diagram.....	10
Figure 13: Antenna connector diagram.....	11
Figure 14: Inserting a MicroSD card	12
Figure 15: Front panel waterproof cover with rubber seal, screw pack and Allen wrench.....	13
Figure 16: Securing the VIA Mobile360 M800 system's front panel	13
Figure 17: Vibration dampening strips	14
Figure 18: Vibration dampening strip installation	14
Figure 19: Recommend installation space requirements.....	15
Figure 20: Wi-Fi/BT/GPS antenna module and extension cables	15
Figure 21: 3M tape protective cover removal	16
Figure 22: Connecting extension cables to the Wi-Fi/BT/GPS antenna module.....	16
Figure 23: Connecting the Wi-Fi/BT/GPS antenna module	17
Figure 24: Front ADAS camera and mounting bracket	17
Figure 25: Installing the Front ADAS camera.....	18
Figure 26: Connecting the ADAS camera.....	18
Figure 27: Adjusting the Front ADAS camera angle.....	19
Figure 28: DMS camera and mounting bracket.....	19
Figure 29: Installing the DMS camera with the 3M tape option	20
Figure 30: Installing the DMS camera on the target surface with the drilling option	20
Figure 31: Connecting the DMS camera.....	21
Figure 32: Adjusting the DMS camera	21
Figure 33: J1939 power cable connections	22
Figure 34: Sample fuse box cover.....	22
Figure 35: Extracting the ACC fuse from the fuse box.....	23
Figure 36: Installing the ACC fuses on the blade fuse holder cable	23
Figure 37: Connecting the Blade Fuse Holder cable to the fuse box.....	23
Figure 38: Connecting the blade fuse holder cable to the J1939 power cable	24
Figure 39: J1939 cable pin-out diagram	24
Figure 40: Plugging in the J1939 cable to the vehicle's J1939 connector port.....	24
Figure 41: Placing caps on unused I/O ports.....	25
Figure 42: RST reset button	26
Figure 43: Applying LOCTITE 243 Threadlocker to I/O ports	28
Figure 44: The ADAS Display accessory	29
Figure 45: ADAS Display front/rear panel I/O	29

Figure 46: ADAS Display's visual alert icons	30
Figure 47: System status LEDs	31
Figure 48: Connecting the ADAS Display to the VIA Mobile360 M800 system	32
Figure 49: Adjusting the ADAS display	33
Figure 50: The 4G LTE wireless module kit	33
Figure 51: Location of the 4G LTE miniPCle module compartment.....	34
Figure 52: Removing the rubber seal cover.....	34
Figure 53: 4G LTE antenna connectors	34
Figure 54: Connecting antennas to the 4G LTE miniPCle module	35
Figure 55: Inserting the 4G LTE miniPCle module	35
Figure 56: Securing the 4G LTE miniPCle module.....	35
Figure 57: Thermal pad placement	35
Figure 58: Rubber seal cover replacement.....	36
Figure 59: Replacing the 4G LTE miniPCle module compartment cover	36
Figure 60: 4G LTE Antenna module protective 3M tape cover removal.....	36
Figure 61: Connecting the 4G LTE antenna module	37
Figure 62: Inserting a Micro SIM card	37
Figure 63: Overview of the OBD II power cable's connections	38
Figure 64: A sample fuse box cover.....	38
Figure 65: Removing the ACC fuse from the vehicle's fuse box	39
Figure 66: Plug in vehicle ACC fuse into compatible blade fuse holder cable	39
Figure 67: Connecting the blade fuse holder cable to the OBD II power cable	39
Figure 68: Connecting the blade fuse holder cable to the vehicle's fuse box	40
Figure 69: OBD II cable pin-out diagram	40
Figure 70: Plugging in the OBD II power cable to the OBD II connector	40
Figure 73: Connecting the Ethernet cable.....	41
Figure 71: Ethernet cable	41
Figure 72: 10/100Mbps Ethernet port diagram	41
Figure 74: CAN Bus and RS-232 cable	42
Figure 75: DB9 connector pin diagram.....	42
Figure 76: Connecting the CAN Bus/RS-232 cable	43
Figure 77: Development kit.....	44
Figure 78: Debug board's UART pin header diagram	44
Figure 79: DIO cable UART Connector pin-outs	44
Figure 80: DIO to debug board and system connection	45
Figure 81: PWR/CAN RD testing cable connection.....	45

List of Tables

Table 01:	MicroSD card slot pin-outs	7
Table 02:	Micro SIM card slot pin-outs	7
Table 03:	DISP port pin-outs	8
Table 04:	CAN/COM port pin-outs	8
Table 05:	DIO port pin-outs	9
Table 06:	LAN port pin-outs	9
Table 07:	CAM port pin-outs	10
Table 08:	PWR/CAN port pin-outs	10
Table 09:	J1939 cable's pin-outs (Cable UL 20276)	24
Table 10:	PWR LED Status	25
Table 11:	OBD II cable pin-outs	40
Table 12:	10/100Mbps Ethernet port pinouts	41
Table 13:	DB9 connector's pin-outs	42
Table 14:	CAN Bus/RS-232 cable exposed wire specifications	43
Table 15:	Debug board's UART pin-outs	44
Table 16:	PWR/CAN RD testing cable CAN-H/CAN-L specifications	46
Table 17:	DIO cable exposed wires specifications	46

1. Product Overview

Enhance fleet efficiency and driver safety for buses, trucks and other large commercial vehicles with the VIA Mobile360 M800 Video Telematics System. Combining cutting-edge AI-powered accident prevention features with advanced driver monitoring functionality, this reliable ultra-compact system has a flexible fit for easy installation in commercial vehicles of all sizes. The VIA Mobile360 M800 system supports FCW (Forward Collision Warning) and LDW (Lane Departure Warning) with its ADAS camera and detection of driver fatigue, distraction, smart phone usage and smoking with its DMS camera.

With its CAN bus support, the system enables the collection of rich vehicle usage data such as speed, distance, idle time and fuel consumption that can be analyzed to identify opportunities for optimizing fleet efficiency and safety. Its 9-36V DC-in power supply allows in-vehicle power delivery using either a J1939 or OBD II connection.

Other features included in this lightweight small footprint device include 1GB DDR3 DRAM, 512MB SPI Flash Memory, a 6-Axis G-sensor, one MicroSD card slot and one Micro SIM card slot.

1.1 Key Features

1.1.1 High Performance in a Compact and Rugged Chassis

With a 1.2GHz dual-core ARM Cortex-A7 dual core SoC and an integrated deep learning accelerator, the VIA Mobile360 M800 system delivers high performance in an ultra-compact IP67-rated enclosure that has been designed to ensure reliable operation in the most demanding on-road conditions. The rugged and compact design of the chassis makes installations in environments with space constraints possible, while ensuring maximum reliability.

1.1.2 Multiple I/O Options

The VIA Mobile360 M800 system comes with a broad array of I/O options, including three AHD camera-in ports, one ADAS Display port, one COM/CAN bus port, one Digital I/O port, one Micro SD card slot and four antenna connectors.

1.1.3 Networking Support

The VIA Mobile360 M800 system supports GPS, Wi-Fi and BT 5.0. It is also equipped with a LAN port and can accommodate an optional 4G wireless module with its miniPCle slot.

1.1.4 1080p Driver Assistance and Monitoring Cameras

The VIA Mobile360 M800 system features an IP-67-rated FOV 60.8° 1080p ADAS camera and an IP67-rated FOV 113° 1080p DMS camera that capture and transmit vibrant HD video footage to the VIA Mobile360 M800 system for processing. Video footage contains data of the prevailing road conditions and the driver.

1.1.5 Cloud Integration

The VIA Mobile360 M800 system is optimized for rapid edge-to-cloud deployments through a comprehensive suite of VIA Fleet SDK, EVK and BSP packages. The VIA Fleet AWS Cloud SDK and VIA Fleet Cloud Management Portal accelerate the integration of AWS applications and services.

**Note:**

A 30-day VIA Fleet Cloud Management portal demo comes included as part of the VIA Mobile360 M800 EVK (evaluation kit). The demo provides unlimited trip tracking and viewing of collision alert videos, along with 50 hours of Amazon KVS streaming.

1.1.6 Support for System-to-Server Deployments

To simplify integration with existing telematics devices installed in the vehicle, the VIA Mobile360 M800 system features an integrated Ethernet connector. The LAN port on the VIA Mobile360 M800 system can be used to stream video and data to existing telematics devices installed in the vehicle.

1.1.7 Customization

Combining advanced video, wireless and CAN bus capabilities with a rich software development and cloud integration environment, the VIA Mobile360 M800 system provides a versatile solution that can be customized to meet your specific deployment requirements. Contact us to learn more about our customization services.

1.2 Product Specifications

Processor

- 1.2 GHz ARM Cortex-A7 dual-core SoC with Deep Learning Accelerator

System Memory

- 1 GB DDR3 SDRAM

Storage

- 512 MB SPI NAND Flash ROM
- 1 MicroSD Card slot

LAN

- 10/100Mbps Ethernet controller

Wireless Connectivity

- 1 GPS/Beidou module
- 1 Wi-Fi 802.11b/g/n/ac and Bluetooth 5.0 module

Sensor

- 1 6-Axis IMU

Expansion I/O

- 1 MiniPCle slot for 4G module

Front Panel I/O

- 1 M12 Display avionic connector (for ADAS Display including microphone & speaker)
- 1 M12 DIO avionic connector (TX/RX for debugging and GPIO)
- 1 M12 CAN/COM avionic connector (supports TX/RX for RS-232)
- 1 M12 LAN avionic connector (10/100Mbps Ethernet)
- 1 Micro SIM Card slot
- 1 MicroSD Card slot (Max 512GB)
- 1 Power LED
- 1 Reset button

Back Panel I/O

- 3 M12 AHD camera avionic connectors
- 1 M12 9~36V, CAN with ACC/IGN avionic connector (supports OBDII/J1939 protocols)
- 4 Antenna connectors (4G x 2, Wi-Fi/BT, GPS)

Power Supply

- 9 ~ 36V DC-in with ACC/IGN

Operating System

- Embedded Linux

Operating Temperature

- -20°C ~ 70°C

Storage Temperature

- -30°C ~ 70°C

Operating Humidity

- 0~95% (non-condensing)

Vibration Loading During Operation

- ISO-16750-3 Test VII compliance

Shock During Operation

- ISO-16750-3 Test VII compliance

Mechanical Construction

- Aluminum alloy top cover
- Metal chassis housing

Dimensions

- 178mm(W) x 53.8mm(H) x 194.6mm(D) (7.01" x 2.12" x 7.66")

Weight

- 1.43kg (3.15lbs)

Ingress Protection Rating

- IP67

Compliance

- CE, FCC, BSMI, NCC, TELEC, SRRC, CTA, UKCA



Note:

As the operating temperature provided in the specifications is a result of testing performed in a testing chamber, a number of variables can influence this result. Please note that the working temperature may vary depending on the actual situation and environment. It is strongly recommended to execute a solid testing program and take all variables into consideration while building the system. Please ensure that the system is stable at the required operating temperature in terms of application.

1.3 System Layout

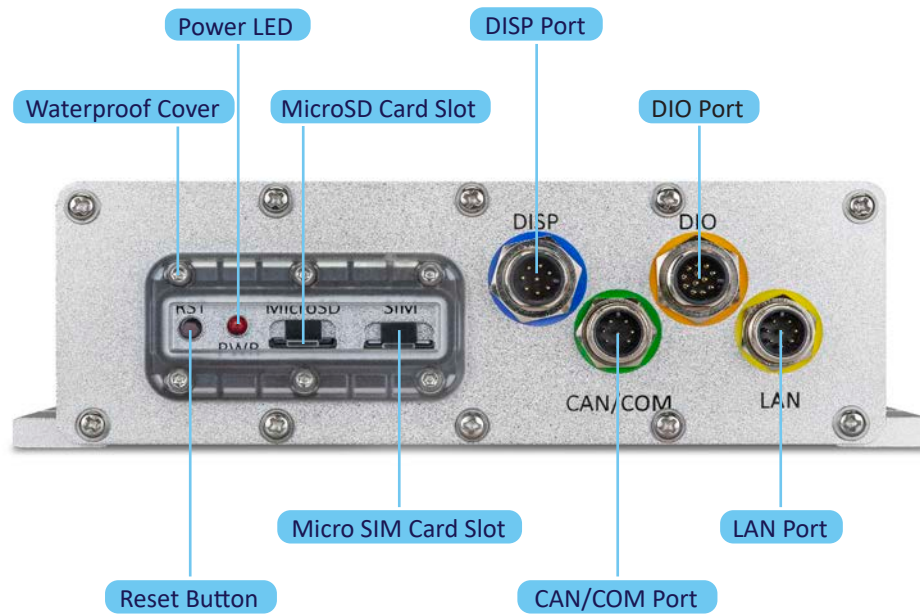


Figure 01: Front panel external I/O layout

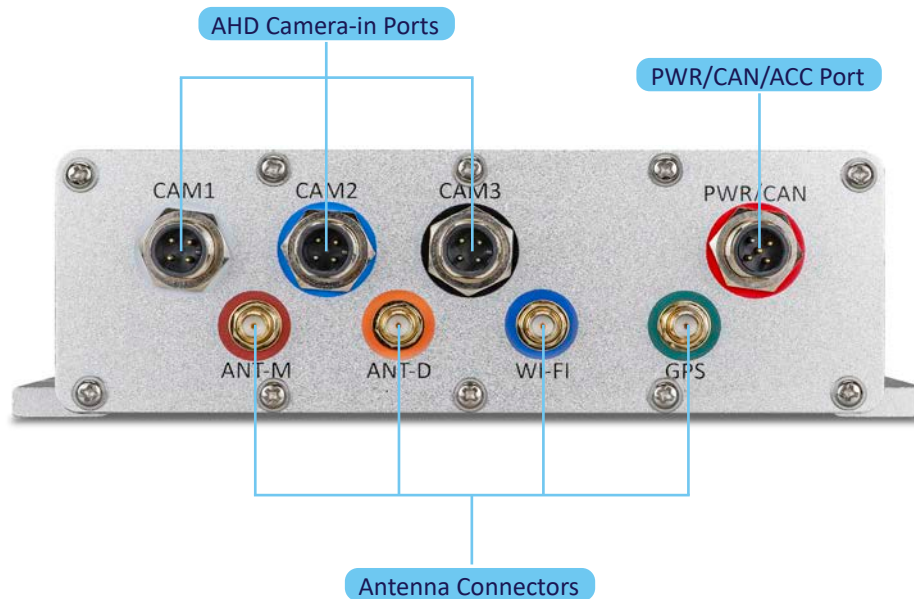


Figure 02: Rear panel external I/O layout



Removable bottom panel for miniPCle slot

Figure 03: Bottom panel external I/O layout

1.4 System Dimensions

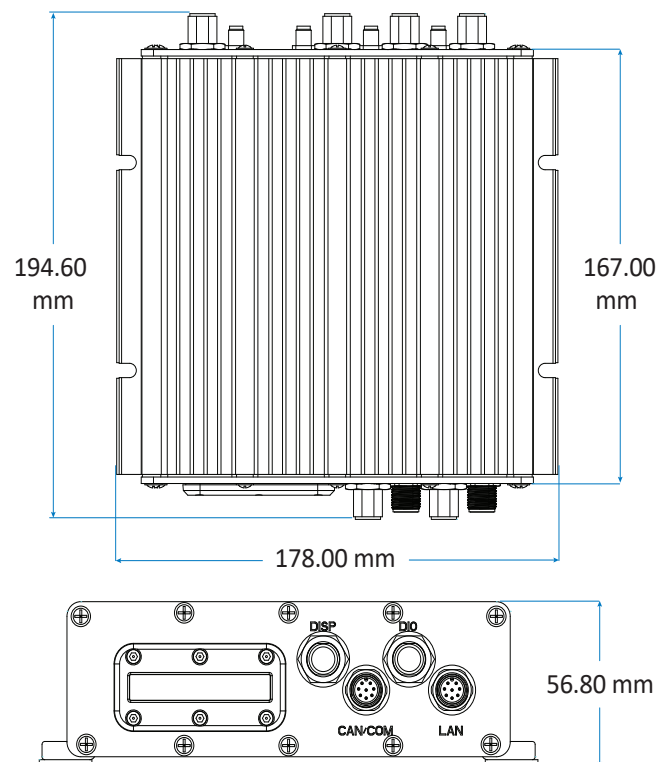


Figure 04: System dimensions

2. External I/O Pin Descriptions and Functionality

The VIA Mobile360 M800 Video Telematics System has a wide selection of I/O interfaces, including a selection of frequently used ports.

2.1 MicroSD Card Slot

The VIA Mobile360 M800 system is equipped with a MicroSD card slot located on the front panel, supporting MicroSD cards with a maximum storage capacity of 512 GB. The pin-outs of the MicroSD card slot are as shown below.

Pin	Signal
1	SD_DAT2
2	SD_DAT3
3	SD_CMD
4	VDD
5	SD_CLK
6	GND
7	SD_DAT0
8	SD_DAT1

Table 01: MicroSD card slot pin-outs

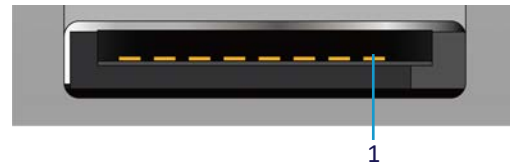


Figure 05: MicroSD card slot diagram

2.2 Micro SIM Card Slot

The VIA Mobile360 M800 system is equipped with a Micro SIM card slot located on the front panel, supporting 4G Micro SIM cards (**not included**). The pin-outs of the Micro SIM card slot are as shown below.



Note:

Micro SIM card usage on the VIA Mobile360 M800 requires that a 4G module be installed in the miniPCIe slot, enabling the 4G functionality. The Micro SIM card slot is designed for use with the optional 4G LTE wireless module.

Pin	Signal
1	VSIM_VCC
2	GND
3	VSIM_RST
4	VSIM_VCC
5	VSIM_CLK
6	VSIM_DATA
7	GND
8	NC

Table 02: Micro SIM card slot pin-outs

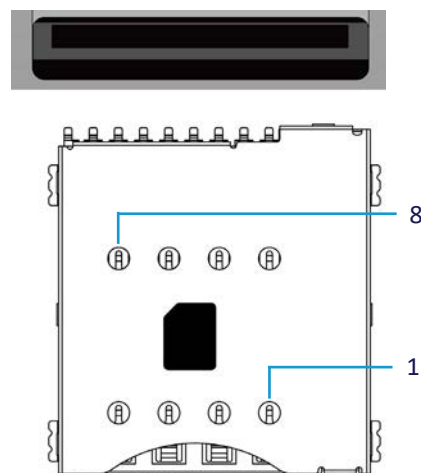


Figure 06: Micro SIM card slot diagram

2.3 DISP Port

The VIA Mobile360 M800 system is equipped with an 8-pin display (DISP) port designated in blue on the front panel, supporting the optional VIA Mobile360 ADAS display. The pin-outs of the DISP port are as shown below.

Pin	Signal
1	12V DC-Out
2	5V DC-Out
3	GND
4	USB+ (for audio)
5	USB- (for audio)
6	GPO3
7	GPO4
8	GND

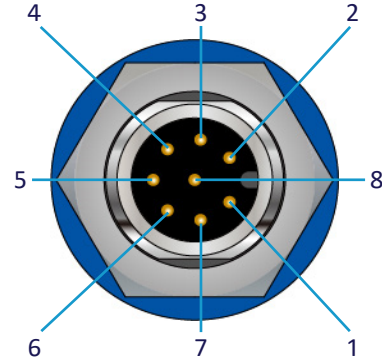


Figure 07: DISP port diagram

Table 03: DISP port pin-outs

2.4 CAN/COM Port

The VIA Mobile360 M800 system is equipped with an 8-pin CAN/COM port designated in green on the front panel, supporting a CAN bus, RS-232 TX/RX COM connection and 12V DC-out with ground pathway. The pin-outs of the CAN/COM port are as shown below.

Pin	Signal
1	12V DC-Out
2-3	NC
4	CAN1 L
5	CAN1 H
6	RS-232 RX
7	RS-232 TX
8	GND




Figure 08: CAN/COM port diagram

Table 04: CAN/COM port pin-outs

2.5 DIO Port

The VIA Mobile360 M800 system is equipped with a 12-pin DIO (digital input-output) port designated in orange on the front panel. The DIO port provides a digital I/O communication interface for a GPIO (5-GPI and 2-GPO), a UART TX/RX connection and 12V DC-out and ground pathway. The pin-outs of the DIO port are as shown below.

Pin	Signal
1	12V DC-Out
2	GPI3
3	GPI5
4	GPI6
5	GPO1
6	GPO2
7	GND
8	GPI1
9	GPI2
10	GND
11	TX (Debug)
12	RX (Debug)

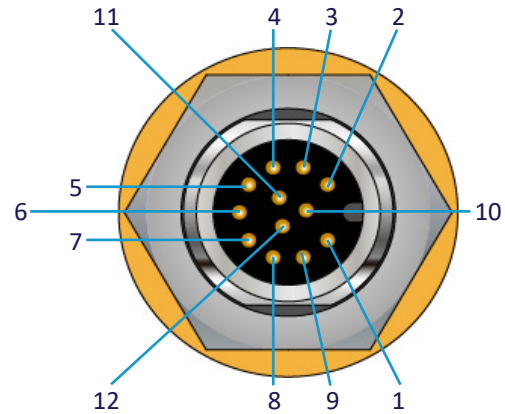


Figure 09: DIO port diagram

Table 05: DIO port pin-outs

2.6 LAN Port

The VIA Mobile360 M800 system is equipped with an 8-pin LAN port designated in yellow on the front panel. The LAN port provides an I/O interface for network connectivity required for VIA Mobile360 M800 to Server SDK and custom implementations. The pin-outs of the LAN port are as shown below.

Pin	Signal
1	TX-P
2	TX-N
3	RX-P
4-5	75Ω to GND
6	RX-N
7-8	75Ω to GND

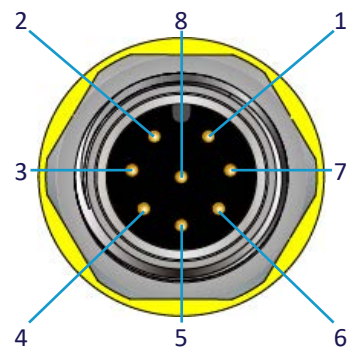


Figure 10: LAN port diagram

Table 06: LAN port pin-outs

2.7 CAM Port

The VIA Mobile360 M800 system is equipped with three 4-pin CAM (camera) ports located on the rear panel. The camera ports are intended for use as specified below.

- CAM1 designated in white: Front ADAS camera
- CAM2 designated in blue: DMS camera
- CAM3 designated in black: Reserved

The pin-outs of the CAM port are as shown below.

Pin	Signal
1	12V DC-Out
2	AHD IN
3	NC
4	GND

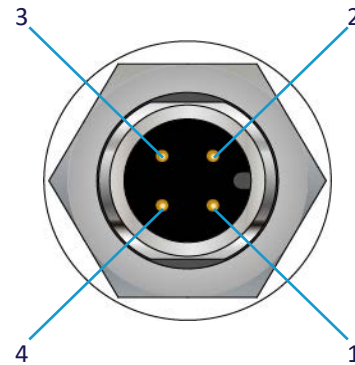


Figure 11: CAM port diagram

Table 07: CAM port pin-outs

2.8 PWR/CAN Port

The VIA Mobile360 M800 system is equipped with a 5-pin PWR/CAN port designated in red on the rear panel. The PWR/CAN port supports the J1939 or optional OBD II cable used to provide power to the VIA Mobile360 M800 system as well as the vehicle ACC signal and CAN bus information. The pin-outs of the PWR/CAN port are as shown below.

Pin	Signal
1	DC-IN
2	ACC/IGN
3	CAN0 L
4	CAN0 H
5	GND

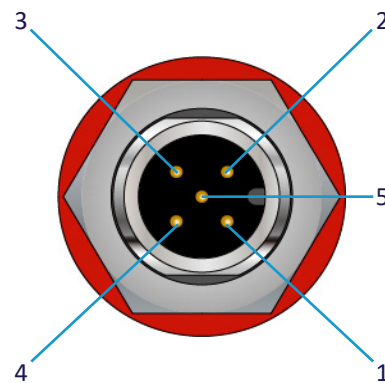


Figure 12: PWR/CAN port diagram

Table 08: PWR/CAN port pin-outs

2.9 Antenna Connectors

The VIA Mobile360 M800 system is equipped with four antenna connectors located on the rear panel. The color-coded antenna connectors are defined as below:

- ANT-M (dark red): 4G LTE MAIN antenna connector
- ANT-D (brown): 4G LTE DIV antenna connector
- Wi-Fi /BT (dark blue): Wi-Fi/Bluetooth antenna connector
- GPS (dark green): GPS antenna connector

The antenna connector port diagram is as shown below.



Figure 13: Antenna connector diagram



Note:

It is recommended to connect the provided 4G LTE antenna module to the VIA Mobile360 M800 system for optimal signal reception when using the optional 4G LTE miniPCIe module.

3. Hardware Installation

3.1 Inserting a MicroSD Card

A 32GB MicroSD card is provided in the VIA Mobile360 M800 system's standard package. MicroSD cards of storage capacities up to 512GB are supported by the VIA Mobile360 M800 system.

**Note:**

Absence of a MicroSD card will not affect the operation of the system, but videos will not be saved.

To insert a MicroSD card into the VIA Mobile360 M800 system follow the steps below.

1. Prepare a MicroSD card with the required amount of storage and ensure it is formatted with the exFAT file system.
2. Locate the MicroSD card slot on the front panel of the VIA Mobile360 M800 system. Ensure that the MicroSD card is facing upwards and gently push the MicroSD card in (using a fingernail or a pin) until a click sound is heard, indicating that it is fully inserted.

**Note:**

To remove the MicroSD card, use a fingernail or a pin to push it until a click is heard. The card can then be removed.

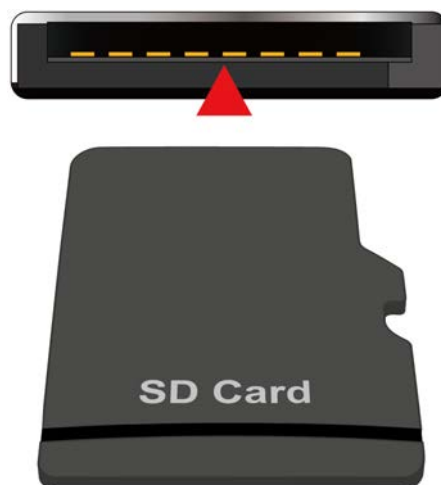


Figure 14: Inserting a MicroSD card

3.2 Securing the Waterproof Cover

The VIA Mobile360 M800 standard package includes a front panel waterproof cover with a rubber seal, screw pack and Allen wrench to seal/protect the RST button, PWR LED, MicroSD slot and the Micro SIM slot.

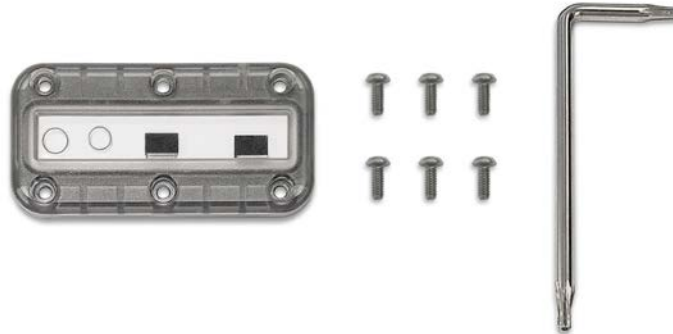


Figure 15: Front panel waterproof cover with rubber seal, screw pack and Allen wrench

To secure the waterproof cover for the MicroSD and SIM card slots located on the front panel, follow the steps below.

1. Insert the flat side of the rubber seal into the groove of the clear plastic cover.
2. Place the cover over the MicroSD and SIM card slots by aligning the screw holes and ensuring the rubber plugs fit securely into the MicroSD and Micro SIM card slots.
3. Secure the cover on the system by tightening the six screws.

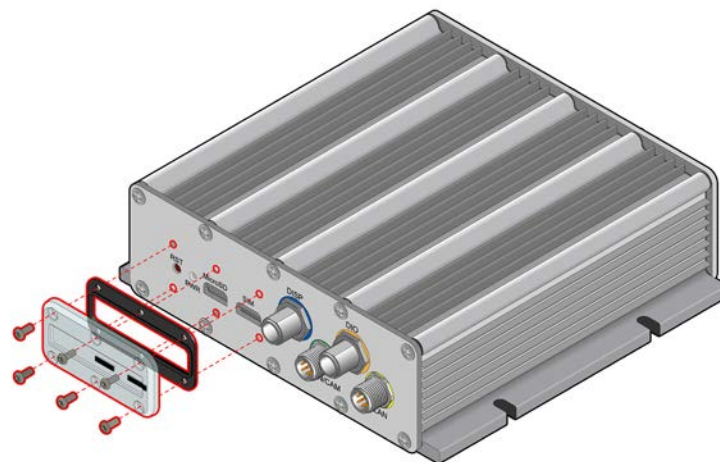


Figure 16: Securing the VIA Mobile360 M800 system's front panel



Note:

If using the optional 4G LTE Wireless Network module, see [Appendix B.2](#), be sure to insert the Micro SIM card (not provided) into the Micro SIM card slot before attaching the waterproof cover.

3.3 Applying the Vibration Dampening Strips

Two vibration dampening strips are included in the VIA Mobile360 M800 system's standard package to help protect the system against vibration caused during operation of the target vehicle.

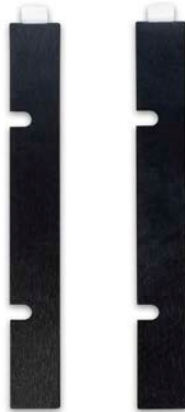


Figure 17: Vibration dampening strips

To attach the two vibration dampening strips, follow the instructions below.

1. Place the VIA Mobile360 M800 system top-down on a flat surface and clean the bottom of the system of any dust or debris.
2. Remove the 3M double coated tissue tape from the back of one of the vibration dampening strips and place it along the side of the system so the screw-hole cutouts align with the system.
3. Repeat the process for the other vibration dampening strip on the opposite side of the system.
4. Ensure the strips adhere tightly to the system.

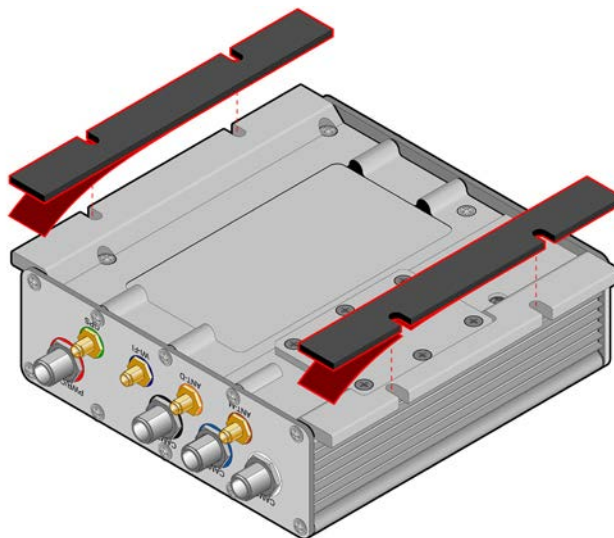


Figure 18: Vibration dampening strip installation

3.4 VIA Mobile360 M800 System Installation

Before Installing the VIA Mobile360 M800 system in a target vehicle, a suitable location should be determined based on the following criteria.

- A flat surface with enough spacing to accommodate the system chassis and room for attaching the cables. The recommended spacing is 218mm(W) x 70mm(H) x 327mm(D) (7.87" x 2.76" x 13.78")
- The location should allow for airflow around the system to ensure proper operation.
- The target surface should support drilling into to support the included four M5*25mm Molly bolts or provide proper adhesion for double-sided 3M VHB tape GPH-160GF (not included) to secure the system such that it will not fall or shift due to vibration or sudden stops or starts, under normal operating conditions.
- The system is placed within the vehicle such that the accessories can be routed safely back to the system from their point of installation.

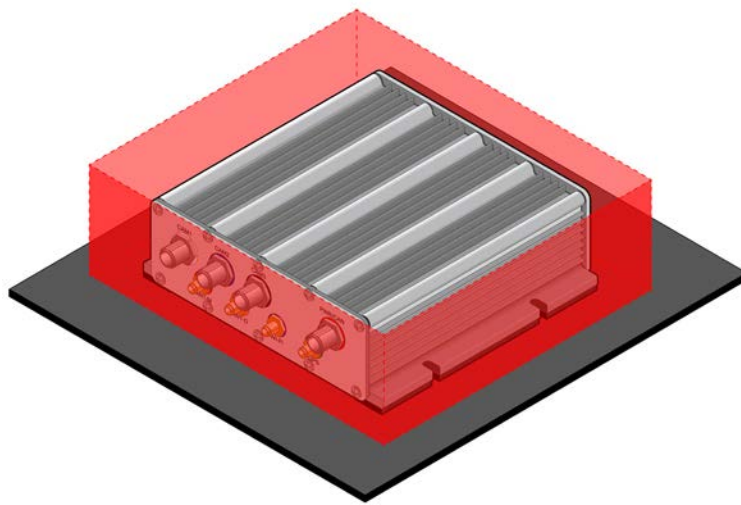


Figure 19: Recommend installation space requirements

3.5 Wi-Fi/BT/GPS Antenna Installation

The VIA Mobile360 M800 system Wi-Fi/BT/GPS antenna module includes two extension cables to allow proper placement within the vehicle.



Figure 20: Wi-Fi/BT/GPS antenna module and extension cables

To install the Wi-Fi/BT/GPS antenna module in the target vehicle, follow the steps below.

1. Find a suitable location with a flat surface in the target vehicle on which the Wi-Fi/BT/GPS antenna module can be secured to.


Note:

It is recommended to place it high up in the vehicle near a window for optimal GPS reception.

2. Clean the target surface of any dirt and debris with alcohol.
3. Remove the protective 3M tape sticker under the Wi-Fi/BT/GPS antenna module and attach it on the target surface. Press firmly to ensure proper adhesion.


Note:

The use of "3MTM VHB™ Tape Universal Primer UV" is recommended to increase the initial bonding strength.



Figure 21: 3M tape protective cover removal

4. Connect the extension cables to the corresponding color-coded cables of the Wi-Fi/BT/GPS antenna module.

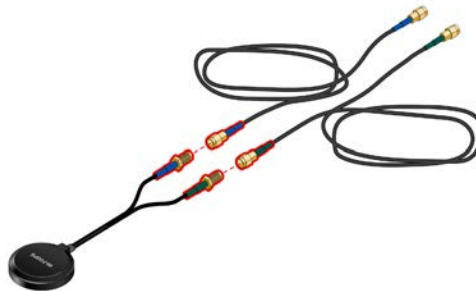


Figure 22: Connecting extension cables to the Wi-Fi/BT/GPS antenna module

5. Connect the Wi-Fi/BT/GPS antenna extension cables to the corresponding color-coded antenna connectors on the rear panel of the VIA Mobile360 M800 system.

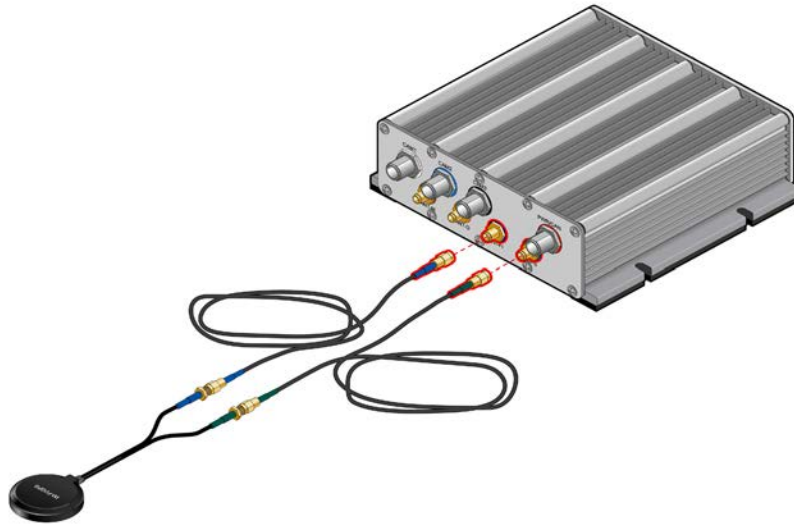


Figure 23: Connecting the Wi-Fi/BT/GPS antenna module



Note:

It is strongly recommended to secure the I/O port connection on the VIA Mobile360 M800 system with LOCTITE 243 Threadlocker (not included) before connecting a cable. Refer to [Appendix A](#) for instructions.

3.6 Front ADAS Camera Installation

The Front ADAS camera is provided in a labeled box as part of the VIA Mobile360 M800 package and comes pre-assembled with a mounting bracket and a piece of double-sided 3M tape.



Figure 24: Front ADAS camera and mounting bracket

Follow the steps below to install the Front ADAS camera in the target vehicle.

1. Identify a suitable location for the Front ADAS camera as close as possible to the center of the windshield, which will not affect the driver's field of vision.
2. Remove all dirt and debris off the target surface by wiping it with alcohol. Remove the 3M tape's protective sticker and carefully place the camera on the target surface (the mounting plate must be above the camera). Press firmly to ensure complete adhesion.



Note:

The use of "3MTM VHB™ Tape Universal Primer UV" is recommended to increase the initial bonding strength.

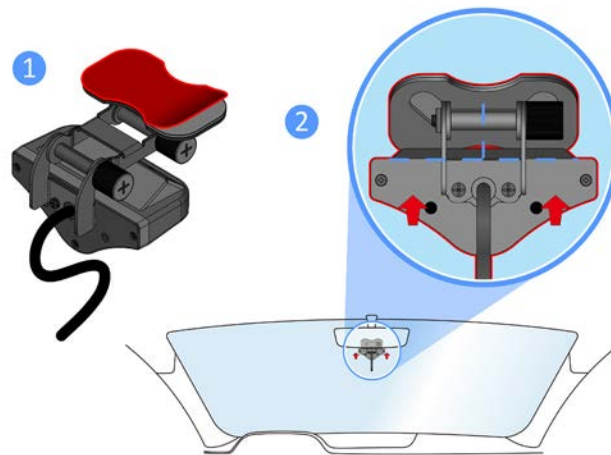


Figure 25: Installing the Front ADAS camera

3. Route the ADAS camera's cable back to the VIA Mobile360 M800 system and connect it to the CAM port (CAM1) designated in white located on the rear panel.

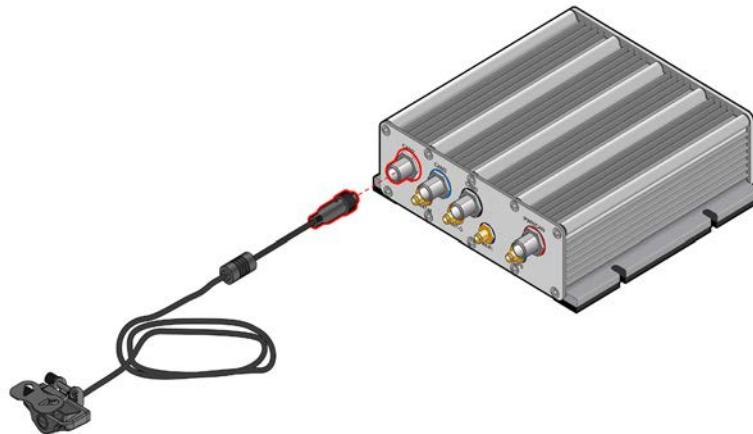


Figure 26: Connecting the ADAS camera



Note:

It is strongly recommended to secure the I/O port connection on the VIA Mobile360 M800 system with LOCTITE 243 Threadlocker (not included) before connecting a cable. Refer to [Appendix A](#) for instructions.

4. The Front ADAS camera can be adjusted as follows.
 - Loosen the two bolts on the camera bracket with a Phillips head screwdriver. Adjust the mounting plate to the same angle as the windshield and the camera so that it is parallel with the ground and as close to the windshield as possible. Tighten the two bolts with a Phillips head screwdriver to secure the camera in place.

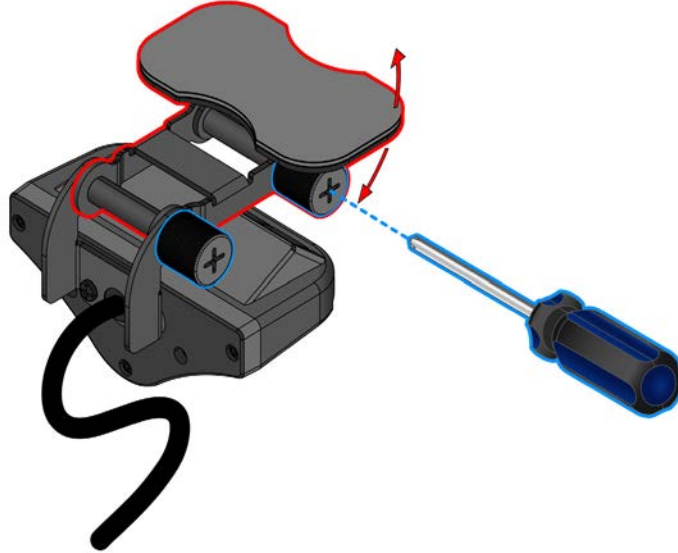


Figure 27: Adjusting the Front ADAS camera angle

3.7 DMS Camera Installation

The DMS camera is provided in a labeled box as part of the VIA Mobile360 M800 package and comes pre-assembled with a mounting bracket and 3M tape. A screw pack with four M5*10mm screws is also included for more secure installation needs.



Figure 28: DMS camera and mounting bracket

To install the DMS camera in the target vehicle, follow the steps below.

1. Find a suitable location with a flat surface in the target vehicle on which the DMS camera can be installed such that a full-frontal view of the driver's face can be obtained (See the VIA Mobile360 M800 Quick Start Guide for more detailed installation requirements). If the drilling option will be used, ensure that there is sufficient depth below the target surface for insertion of the provided four M5*10mm screws.

2. Prepare the target surface for installation and install the camera.
 - If the 3M tape option will be used, remove all dirt and debris off the target surface by wiping it with alcohol. Remove the 3M tape's protective sticker and carefully place the camera mount assembly on the target surface. Press firmly to ensure complete adhesion.


Note:

The use of "3MTM VHB™ Tape Universal Primer UV" is recommended to increase the initial bonding strength.

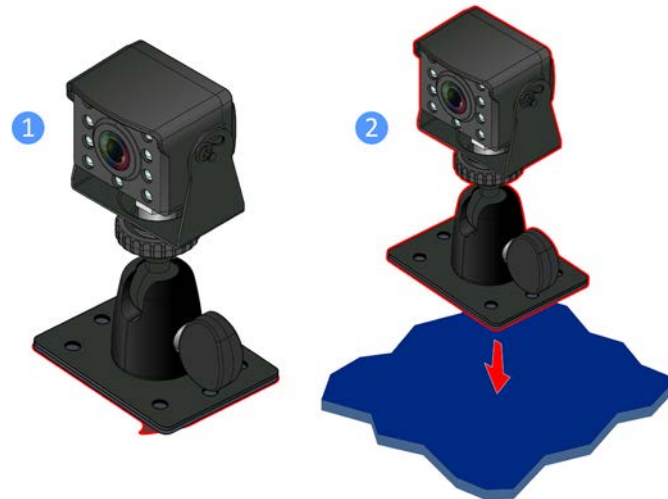


Figure 29: Installing the DMS camera with the 3M tape option

- If the drilling option will be used, place the rectangular plate of the DMS camera mount on the target surface and mark the positions of the screw-holes on the plate. Drill holes into the marked positions. Align the screw-holes on the plate holes to the drilled holes on the target surface. Fix firmly in place with the four M5*10mm screws.



Figure 30: Installing the DMS camera on the target surface with the drilling option

3. Route the DMS camera's cable back to the VIA Mobile360 M800 system and connect it to the CAM port (CAM2) designated in blue on the rear panel.

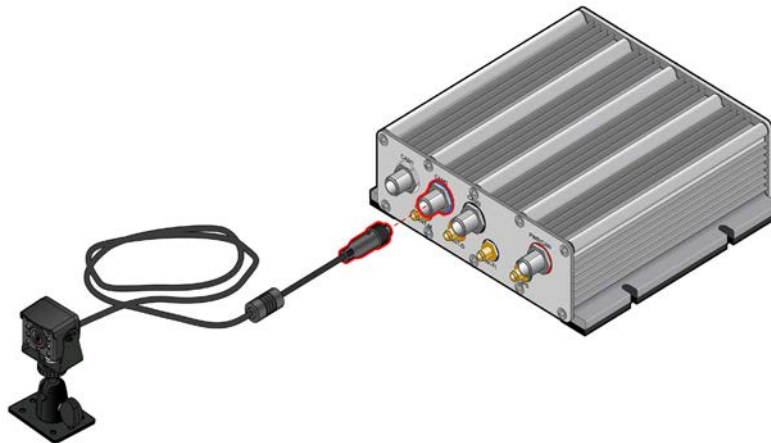


Figure 31: Connecting the DMS camera



Note:

It is strongly recommended to secure the I/O port connection on the VIA Mobile360 M800 system with LOCTITE 243 Threadlocker (not included) before connecting a cable. Refer to [Appendix A](#) for instructions.

4. The DMS camera position can be adjusted as follows.
 - Turn the ball-head mount's thumbscrew counter-clockwise to loosen it, then rotate or swivel the camera and the bottom plate to the desired positions. Once positioned correctly, turn the ball-head mount's thumbscrew clockwise to tighten it.
 - Loosen the camera bracket's screws with a Phillips head screwdriver, and then adjust the camera module up or down to the desired position. Once positioned correctly, tighten the camera bracket's screws with a Phillips head screwdriver.

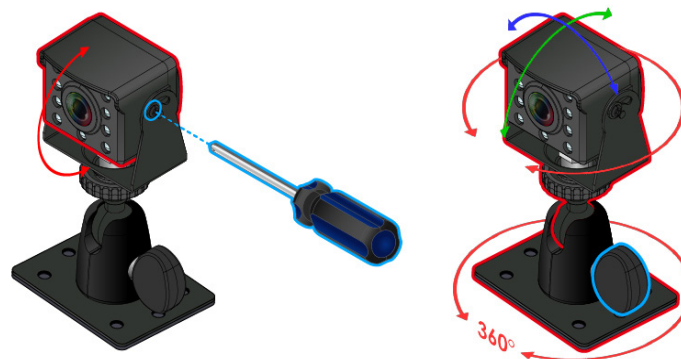


Figure 32: Adjusting the DMS camera

3.8 Installing the J1939 Power Cable

The J1939 power cable is used to provide power, standard CAN bus data and the vehicle's ACC signal to the VIA Mobile360 M800 system. The diagram below shows the connections required.

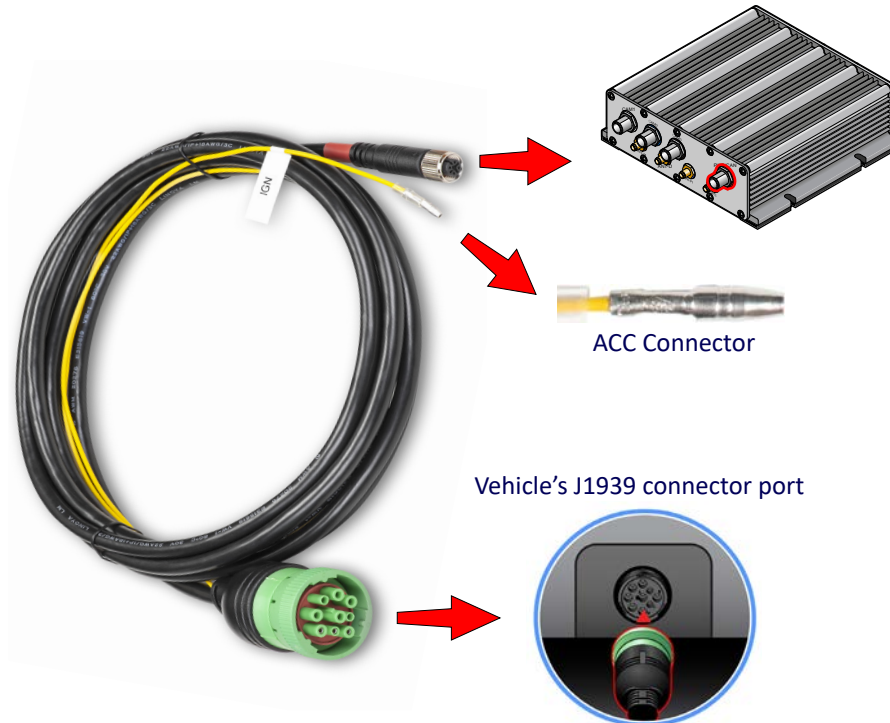


Figure 33: J1939 power cable connections



Note:

Before connecting power supply to the VIA Mobile360 M800 system, check and confirm that the target vehicle can supply the required system power ranging from 9 ~36V DC. After confirming, follow the steps below.

Make sure the target vehicle is powered OFF and follow the instructions below to connect the J1939 cable.

1. Check the target vehicle's user manual to find the location of the fuse box and the J1939 port in the vehicle.
2. Locate the ACC fuse within the fuse box and determine the correct fuse size required.

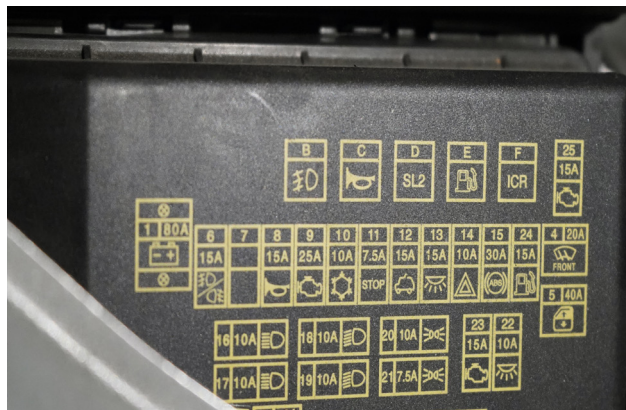


Figure 34: Sample fuse box cover

3. Pull out the ACC fuse from the target vehicle's fuse box.

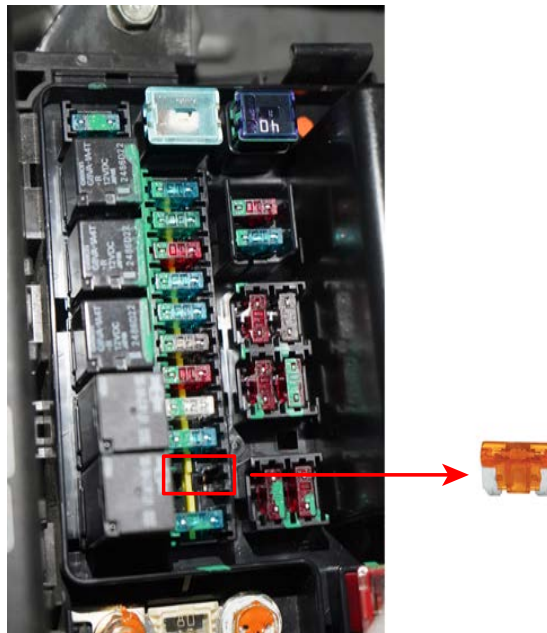


Figure 35: Extracting the ACC fuse from the fuse box

4. Select a compatible yellow blade fuse holder cable from the blade fuse holder cable accessory pack provided in the VIA Mobile360 M800 system's standard package. Plug in the removed ACC fuse into the empty slot in the compatible blade fuse holder cable.

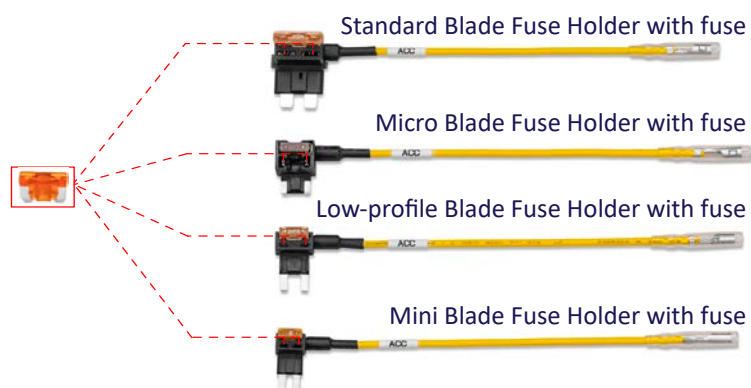


Figure 36: Installing the ACC fuses on the blade fuse holder cable

5. Plug in the blade fuse holder cable into the ACC fuse slot in the vehicle's fuse box.

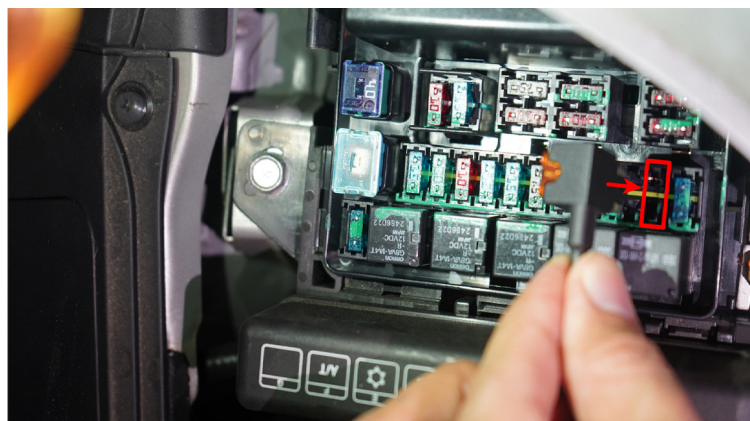


Figure 37: Connecting the Blade Fuse Holder cable to the fuse box

6. Connect the other end of the blade fuse holder cable to the yellow ACC/IGN wire of the J1939 cable as shown in the diagram below. Make sure to slide the plastic protective cover over the connection points to protect the connection.



Figure 38: Connecting the blade fuse holder cable to the J1939 power cable

7. Plug in the J1939 cable to the J1939 connector port in the target vehicle.

	J1939 Connector	Cable AWG
Signal Name	Pin No.	UL Type and Color
B+	B	18AWG RED
GND	A	18AWG BLACK
ACC-IN	-	18AWG YELLOW Bullet-Terminal
CAN_L	D	22AWG WHITE
CAN_H	C	22AWG GREEN
-	E, F, G, H and J	Not used

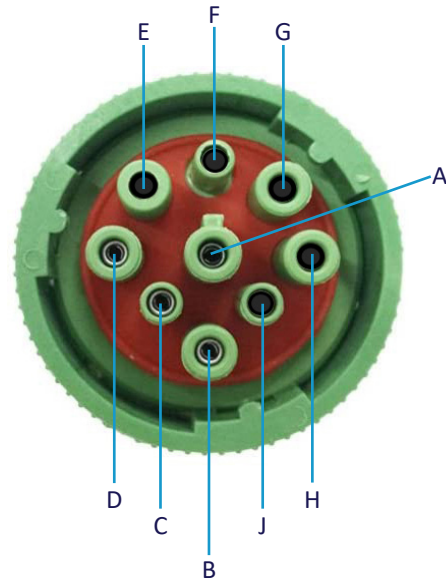


Figure 39: J1939 cable pin-out diagram

Table 09: J1939 cable's pin-outs (Cable UL 20276)



Figure 40: Plugging in the J1939 cable to the vehicle's J1939 connector port

8. Route the cable back to the VIA Mobile360 M800 system and connect it to the "PWR/CAN" port designated in red on the rear panel.



Note:

It is strongly recommended to secure the I/O port connection on the VIA Mobile360 M800 system with LOCTITE 243 Threadlocker (not included) before connecting a cable. Refer to [Appendix A](#) for instructions.

3.9 Placing the Caps on Unused I/O Ports

The VIA Mobile360 M800 system comes with additional I/O ports for connecting optional accessories. It is recommended to cover the unused ports with the provided caps to ensure the IP67 rating. To cover the unused ports, follow the instructions below.

1. On the front I/O panel of the VIA Mobile360 M800 system, the DIO, CAN/COM and LAN ports are not required for the standard setup.
 - Use three of the provided M12 caps to cover the DIO, CAN/COM and LAN ports. Ensure the caps are fitted securely.
2. On the rear I/O panel of the VIA Mobile360 M800 system, the CAM3, ANT-M (4G main) and ANT-D (4G diversity) ports are not required for the standard setup.
 - Use one of the provided M12 caps to cover the CAM3 port. Ensure the cap is fitted securely.
 - Use the two provided SMA caps to cover the ANT-M and ANT-D ports. Ensure that the caps are fitted securely.

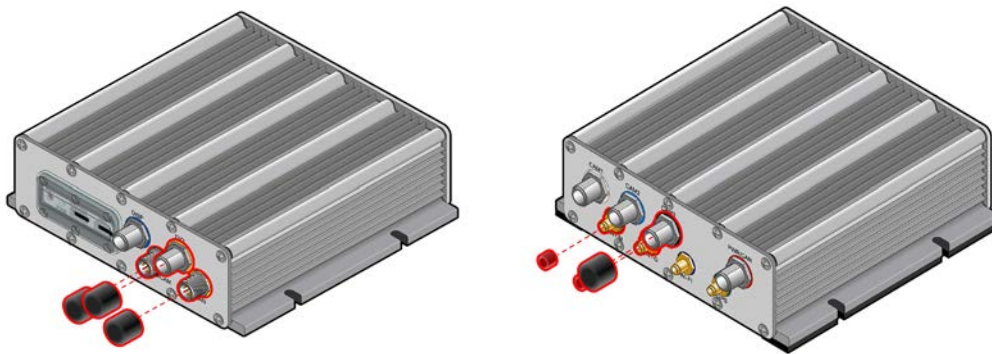


Figure 41: Placing caps on unused I/O ports

3.10 Powering System ON/OFF

After the VIA Mobile360 M800 system is fully installed, power ON the target vehicle and the system will power ON too. See the table below for the description of the system status based on the PWR system power LED indicator state located on the front I/O panel.



Note:

It is recommended to keep the system on for at least 10 minutes upon the first boot to ensure the system fully charges.

LED	Flash Frequency	Description
Flash Frequency	Solid ON	System boot complete
	OFF	System is powered OFF
	4 flashes per second	Firmware upgrading
	1 flash per second	System powering ON/powering OFF

Table 10: PWR LED Status

After the target vehicle is turned off, the cameras will be turned off immediately, followed by the video recording. When the system has completely shut down, the system power LED indicator will turn off.

3.10.1 System Reset

The VIA Mobile360 M800 system includes a reset (RST) button for a system power reset or a complete factory reset when required.



Figure 42: RST reset button

- **Power Reset** - If the VIA Mobile360 M800 system hangs during a firmware update process, use a pin or a fingernail to press and hold the RST button for 3 seconds. After the VIA Mobile360 M800 system reboots, the update can be retried.
- **Factory Reset** - A factory reset can be used to restore the VIA Mobile360 M800 system to default system settings if required. To perform the factory reset, press and hold the RST button for 8 seconds or until the audio alert "factory reset in progress" is heard. The system will complete the factory reset and reboot itself. A factory reset of the VIA Mobile360 M800 system can also be used to reset the Wi-Fi password if forgotten.



Note:

The factory reset will remove the ADAS and DMS camera calibration data. Perform ADAS and DMS camera calibration again before using the VIA Mobile360 M800 system.

4. Technical Support and Assistance

- For technical support and additional assistance, contact your local sales representative/board distributor or visit webpage <https://www.viatech.com/en/support/technical-support/> for technical support.
- For OEM clients and system integrators developing a product for long-term production, other code and resources may also be made available. Visit webpage <https://www.viatech.com/en/about/contact> to submit a request.

Appendix A Securing Port Connections with LOCTITE 243 Threadlocker

The connection between the VIA Mobile360 M800 system and the peripheral accessories may become loose due to the vibration created during operation. It is strongly recommended to secure all M12 and SMA port connections with LOCTITE 243 Threadlocker (**not included**) prior to installation. Follow the steps below to apply the glue.

1. Unscrew the cap of the LOCTITE 243 Threadlocker bottle and align the dispensing head with the thread.
2. Apply one to two drops of glue around the port connector.

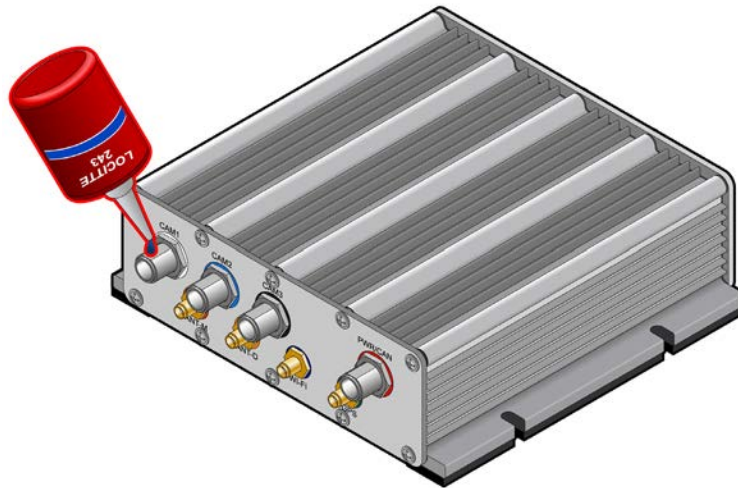


Figure 43: Applying LOCTITE 243 Threadlocker to I/O ports

3. Secure the cable to the port soon after (within 5 minutes) applying the glue to prevent the glue from curing too soon.
4. The glue needs 3 hours to cure completely. Please do not strongly vibrate or twist the cable during this time.

Appendix B Optional Accessories

B.1 ADAS Display

The optional ADAS Display provides audio and visual alerts for the VIA Mobile360 M800 AI alerts as well as echo cancelling microphones and a multi-function button for creating driver alerts and requesting 2-way calls. The device comes pre-assembled with a mounting bracket that has a piece of double-sided 3M tape already attached to it.



Figure 44: The ADAS Display accessory

The ADAS Display has an LED panel, a microphone array, speaker and a driver alert/two-way call button. The driver alert/two-way call button is for recording driver alert videos from both cameras (10 seconds before and X seconds after) when pushed with a short press. The button can also create an alert message when pressed for more than 3 seconds to request a 2-way call.



Figure 45: ADAS Display front/rear panel I/O

B.1.1 LED Panel

The ADAS Display LED panel also provides alert indicators for forward collision and lane departure warnings (FCW and LDW) as well as system status indicators, as shown in the figure below.

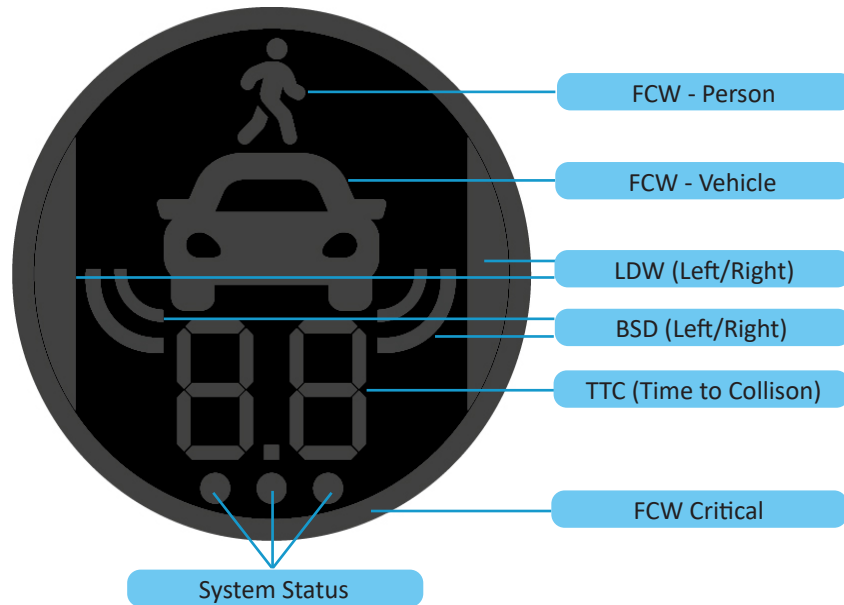



Figure 46: ADAS Display's visual alert icons



Note:


Blind Spot Detection (BSD) alerts are not available with the standard VIA Mobile360 M800 system configuration.

Forward Collision Warning Visual Alerts

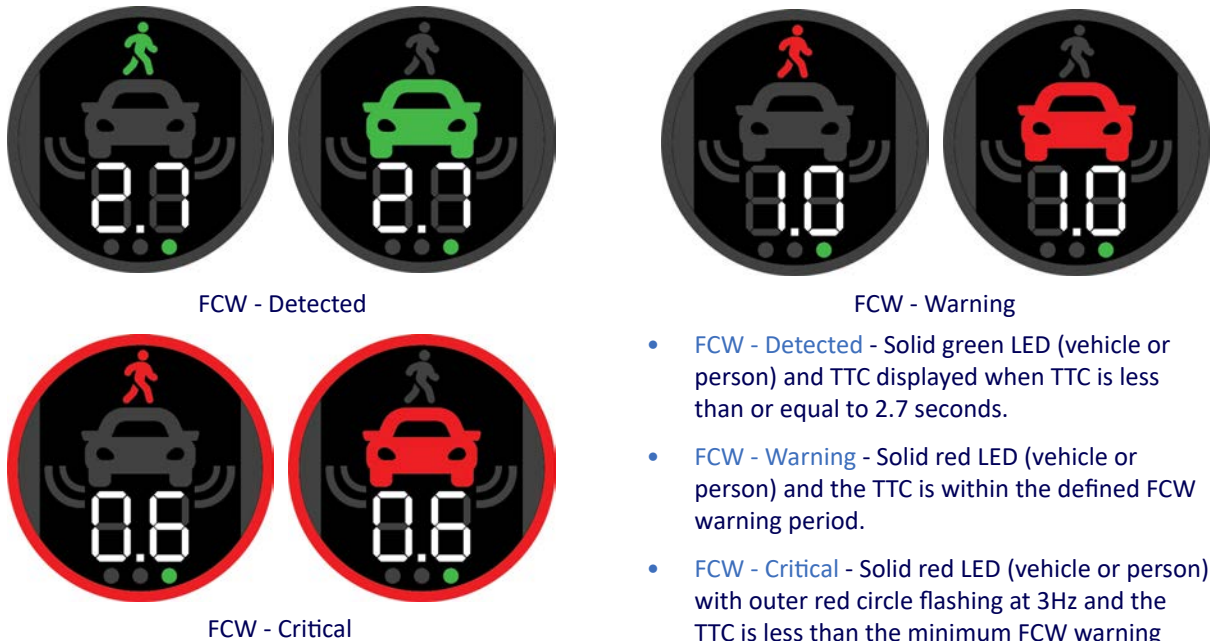

- **FCW - Detected** - Solid green LED (vehicle or person) and TTC displayed when TTC is less than or equal to 2.7 seconds.
- **FCW - Warning** - Solid red LED (vehicle or person) and the TTC is within the defined FCW warning period.
- **FCW - Critical** - Solid red LED (vehicle or person) with outer red circle flashing at 3Hz and the TTC is less than the minimum FCW warning time.

Lane Departure Warning Visual Alerts

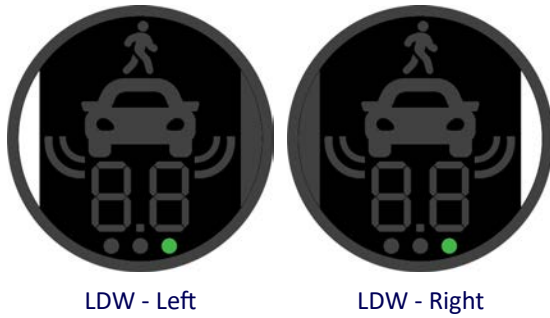

- LDW - Detected - Solid white LDW LED when LDW (left/right) detected.

System Status LEDs

The VIA Mobile360 M800 system's ADAS Display accessory has three LED indicators located on the front panel to display system status for various situations.



Figure 47: System status LEDs

- Device Boot Up - All three LEDs flashing at 1Hz
- Recording - Solid green LED
- SD Error - Red and yellow LEDs flashing at 1Hz
- Hotspot Startup - Yellow LED flashing at 1Hz and solid green LED
- Recording Error - Solid red and yellow LEDs
- Mic Error - Red LED flashing at 1Hz and solid green LED
- Mobile Network Startup - Red LED flashing at 10Hz and solid green LED
- Firmware Upgrading - Red LED flashing at 2Hz and solid green LED
- Sensor/GPS Error - Red and yellow LEDs flashing at 1Hz and solid green LED
- MCU Upgrading - Red LED flashing at 2Hz and solid green LED

B.1.2 Installing the ADAS Display

Follow the steps below to install the ADAS Display in the target vehicle.

1. Identify a suitable location near the driver's seat that does not affect the driver's field of vision.
2. Remove all dirt and debris off the target surface by wiping it with alcohol. Remove the 3M tape's protective sticker under the mounting bracket and carefully place the ADAS Display mount assembly on the target surface. Press firmly to ensure complete adhesion.
3. Route the cable back to the VIA Mobile360 M800 system and connect the ADAS Display to the DISP port designated in blue on the front panel.

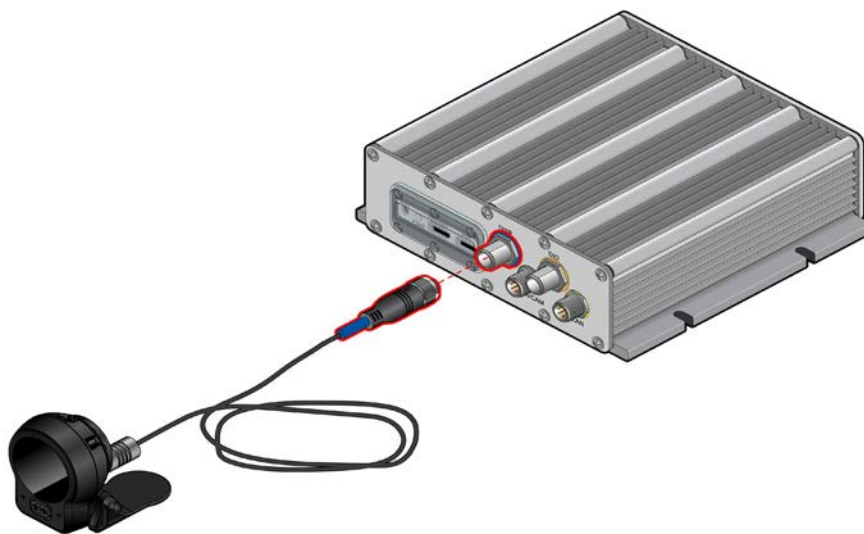


Figure 48: Connecting the ADAS Display to the VIA Mobile360 M800 system



Note:

It is strongly recommended to secure the I/O port connection on the VIA Mobile360 M800 system with LOCTITE 243 Threadlocker (**not included**) before connecting a cable. Refer to [Appendix A](#) for instructions.

4. The ADAS display position can be adjusted as follows.
 - To rotate the angle of the mounting plate, press the "unlock" button on the top of the device and turn the mounting bracket left/right. Once positioned correctly, release the "unlock" button and adjust the mounting plate until it clicks securely in place.
 - Turn the thumbscrew counter-clockwise to loosen it, then rotate the mounting plate to the desired angle. Once positioned correctly, turn the thumbscrew clockwise to tighten it.



Figure 49: Adjusting the ADAS display

B.2 4G LTE Wireless Module Kit

The 4G LTE wireless module kit includes a 4G miniPCIe module with a thermal pad and an M2*4mm screw pack as well as an antenna module to provide connectivity for cloud enabled deployments (**SIM card not included**).



Note:

The 4G LTE wireless module kit is required to utilize the free VIA Fleet Cloud Management Portal demo. An activated Micro SIM card is also required.



Figure 50: The 4G LTE wireless module kit



Note:

The 4G LTE accessory kit does not include an activated 4G LTE SIM card.

To install the 4G LTE wireless module kit in the VIA Mobile360 M800 system, follow the steps below.

1. Remove the eight screws with a Phillips head screwdriver to remove the cover from the bottom panel of the VIA Mobile360 M800 system.

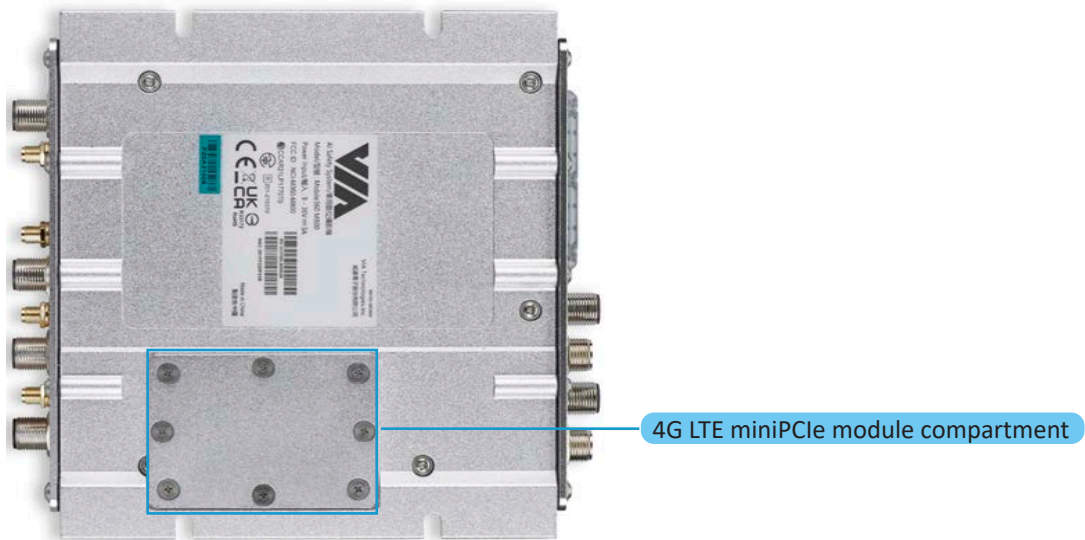


Figure 51: Location of the 4G LTE miniPCIe module compartment

2. Remove the rubber seal cover on the compartment's rim.



Figure 52: Removing the rubber seal cover

3. Remove the yellow insulation tape holding down the two antenna connectors.

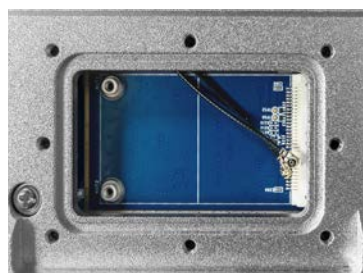


Figure 53: 4G LTE antenna connectors

4. Refer to the figure below to connect the two antenna plugs to the 4G LTE miniPCle module.
 - Connect the antenna with a red marking on the antenna connector plug to the MAIN port on the 4G LTE miniPCle module.
 - Connect the other antenna with no marking on the antenna connector plug to the DIV port on the 4G LTE miniPCle module.

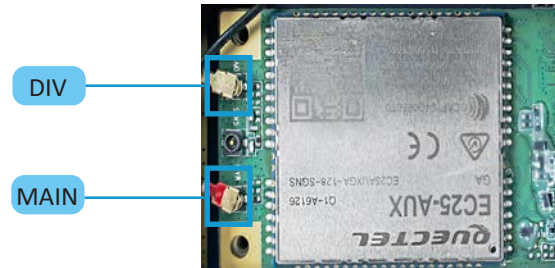


Figure 54: Connecting antennas to the 4G LTE miniPCle module

5. Carefully insert the 4G LTE miniPCle module into the miniPCle slot located in the open compartment.

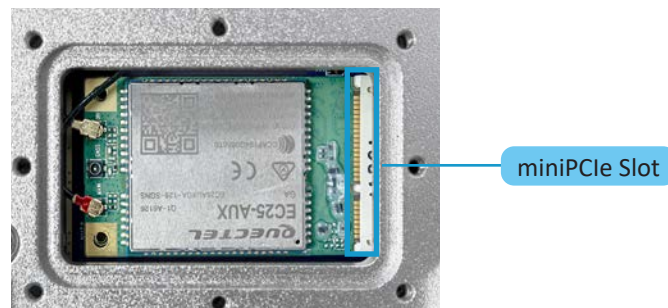


Figure 55: Inserting the 4G LTE miniPCle module

6. Use the two M2*4mm screws (provided in the 4G LTE wireless module kit) to secure the 4G LTE miniPCle module tightly in place.



Figure 56: Securing the 4G LTE miniPCle module

7. Remove the protective film from both sides of the thermal pad (provided in the 4G LTE accessory kit) and place it on top of the 4G LTE miniPCle module's shielding, taking care to align the corners of the pad with the corners of the 4G LTE miniPCle module's shielding.



Figure 57: Thermal pad placement

8. Place the rubber seal cover back on the compartment's rim.



Figure 58: Rubber seal cover replacement

9. Place the 4G LTE miniPCle module compartment's lid back on top of the rubber seal cover and secure the lid tightly in place as shown in the figure below.

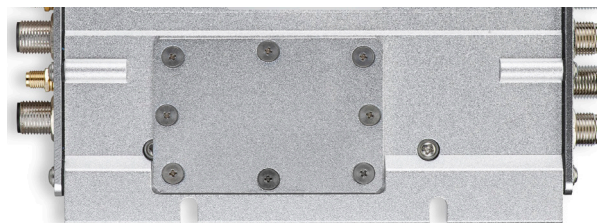


Figure 59: Replacing the 4G LTE miniPCle module compartment cover

10. Find a suitable location with a flat surface in the target vehicle on which the 4G LTE antenna module can be mounted.
11. Clean the target surface of any dirt and debris with alcohol.
12. Remove the protective 3M tape cover and affix the 4G LTE antenna module on the target surface. Press firmly to ensure proper adhesion.



Figure 60: 4G LTE Antenna module protective 3M tape cover removal

13. Connect the 4G LTE antenna module's cables to the corresponding color-coded antenna connectors on the rear panel of the VIA Mobile360 M800 system.

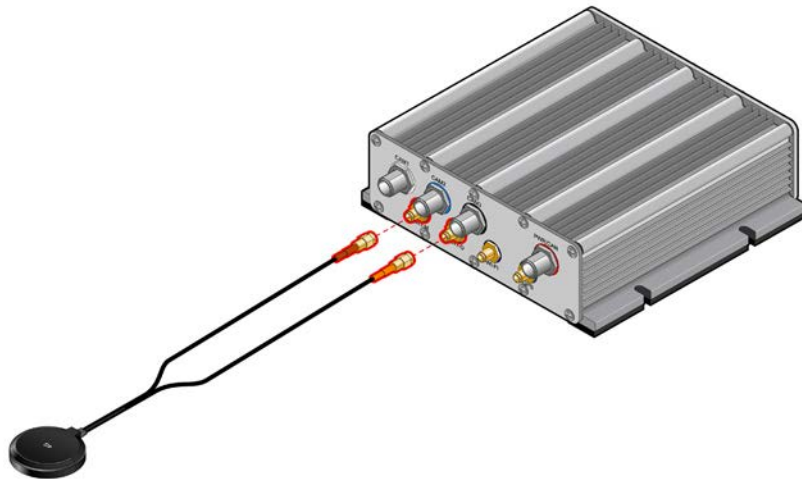


Figure 61: Connecting the 4G LTE antenna module



Note:

It is strongly recommended to secure the I/O port connection on the VIA Mobile360 M800 system with LOCTITE 243 Threadlocker (not included) before connecting a cable. Refer to [Appendix A](#) for instructions.

14. To activate 4G LTE wireless network connectivity on the VIA Mobile360 M800 system:

- Prepare an activated 4G LTE Micro SIM card.
- Locate the SIM slot on the front panel of the VIA Mobile360 M800 system.
- Ensure that the correct end of the SIM card is facing the slot.
- Gently push the SIM card in the slot (using a fingernail or a pin) until a 'click' sound is heard, indicating that it is fully inserted.
- Finally, power the system on.




Figure 62: Inserting a Micro SIM card

B.3 OBD II Power Cable

The optional OBD II power cable can be used in place of the standard J1939 power cable in vehicles with an OBD II port to provide power, standard CAN bus data and the vehicle's ACC signal. The diagram below shows the connections required.

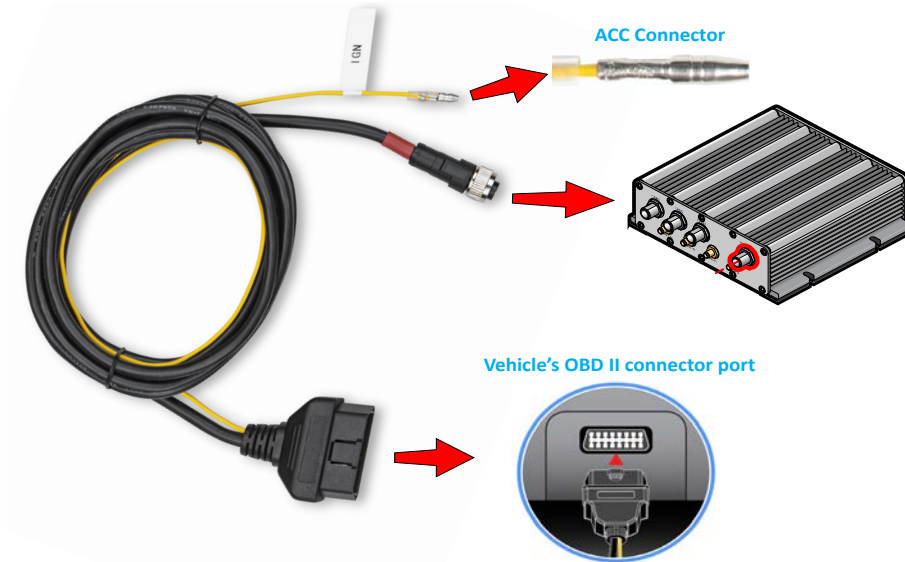


Figure 63: Overview of the OBD II power cable's connections



Note:

Before connecting power supply to the VIA Mobile360 M800 system, check and confirm that the target vehicle can supply the required system power ranging from 9 ~36V DC. After confirming, follow the steps below.

Make sure the target vehicle is powered OFF and follow the instructions below to connect the OBD II power cable.

1. Check the target vehicle's user manual to find the location of the fuse box and the OBD II connection port in the vehicle.
2. Locate the ACC fuse within the fuse box and determine the correct fuse size required.

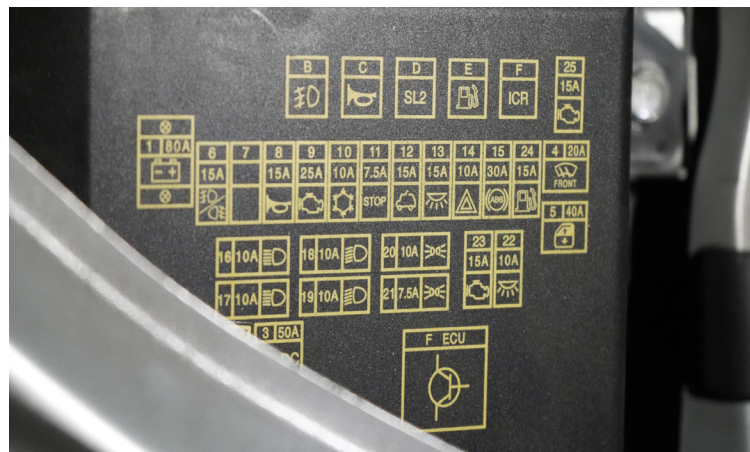


Figure 64: A sample fuse box cover

3. Pull out the ACC fuse from the target vehicle's fuse box.

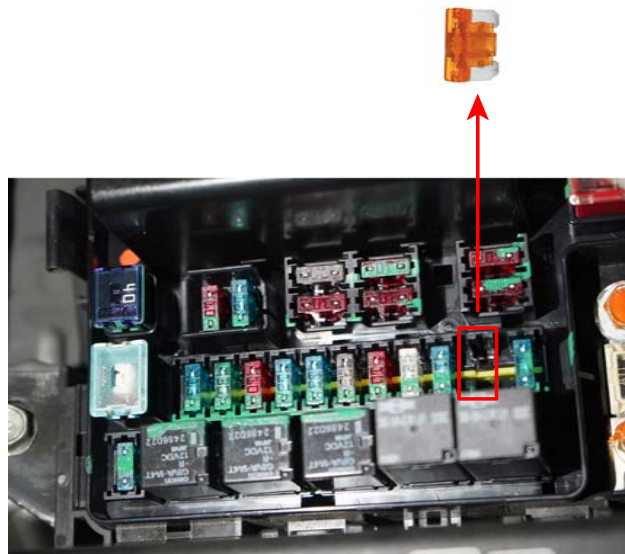


Figure 65: Removing the ACC fuse from the vehicle's fuse box

4. Select a compatible yellow blade fuse holder cable provided in the VIA Mobile360 M800 system's standard package. Plug in the removed ACC fuse into the free slot in the compatible blade fuse holder cable.

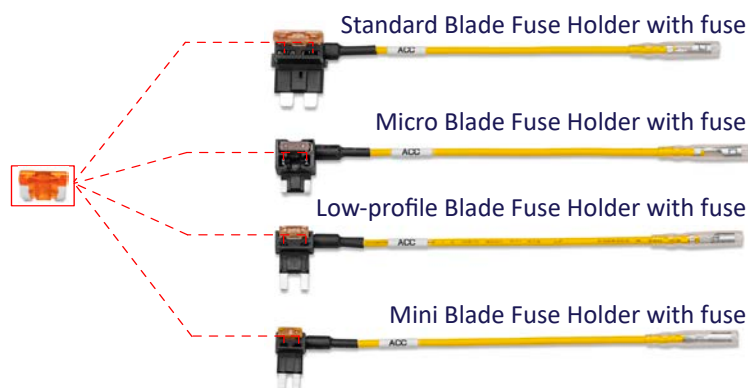


Figure 66: Plug in vehicle ACC fuse into compatible blade fuse holder cable

5. Connect the exposed end of the blade fuse holder cable to the yellow ACC/IGN wire of the OBD II power cable as shown in the diagram below. Make sure to slide the plastic protective cover over the connection points to protect the connection.



Figure 67: Connecting the blade fuse holder cable to the OBD II power cable

6. Insert the blade fuse holder into the ACC fuse slot in the fuse box.

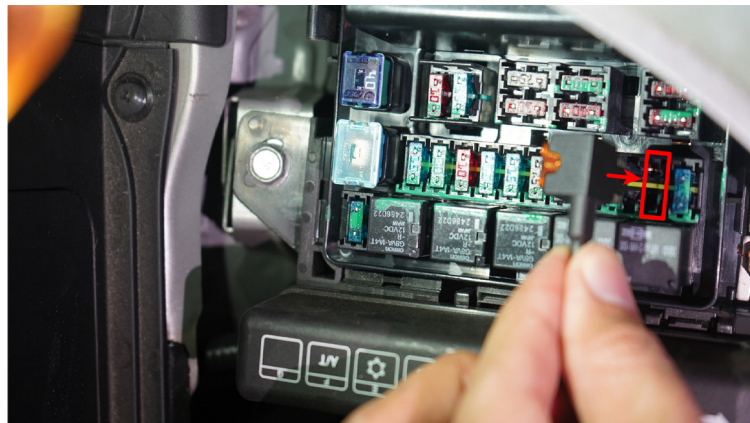


Figure 68: Connecting the blade fuse holder cable to the vehicle's fuse box

7. Plug the OBD II cable to the OBD II port in the target vehicle.

Signal Name	OB2 II Connector	Cable AWG
	Pin No.	UL Type and Color
B+	16	18AWG RED
GND	5	18AWG BLACK
ACC-IN	-	18AWG YELLOW Bullet-Terminal
CAN_L	14	26AWG WHITE
CAN_H	6	26AWG GREEN
-	1, 2, 3, 4, 7, 8, 9, 10, 11, 12, 13 & 15	Not used

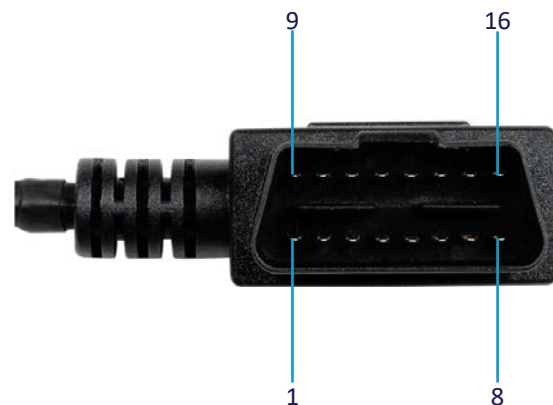


Figure 69: OBD II cable pin-out diagram

Table 11: OBD II cable pin-outs




Figure 70: Plugging in the OBD II power cable to the OBD II connector

8. Route the cable back to the VIA Mobile360 M800 system and connect it to red color-coded "PWR/CAN" port on the rear panel of the VIA Mobile360 M800 system.



Note:

It is strongly recommended to secure the I/O port connection on the VIA Mobile360 M800 system with LOCTITE 243 Threadlocker (not included) before connecting a cable. Refer to [Appendix A](#) for instructions.

B.4 Ethernet Cable

The optional Ethernet cable can be used to provide a standard RJ-45 LAN interface for the VIA Mobile360 M800 system.



Figure 71: Ethernet cable

The female adaptor of the Ethernet port of the Ethernet cable uses an 8 Position 8 Contact (8P8C) receptacle connector (commonly referred to as RJ-45). The pinout of the 10/100Mbps Ethernet port is shown below.

Pin	Signal
1	TD+
2	TD-
3	RD+
4	REGOUT
5	REGOUT
6	RD-
7	GND
8	GND

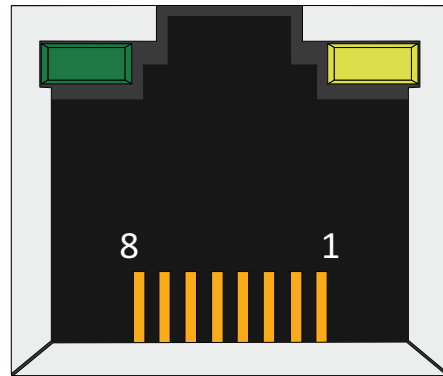


Figure 72: 10/100Mbps Ethernet port diagram

Table 12: 10/100Mbps Ethernet port pinouts

The Ethernet cable connects to the yellow color-coded LAN port located on the front panel of the VIA Mobile360 M800 system, as shown below.

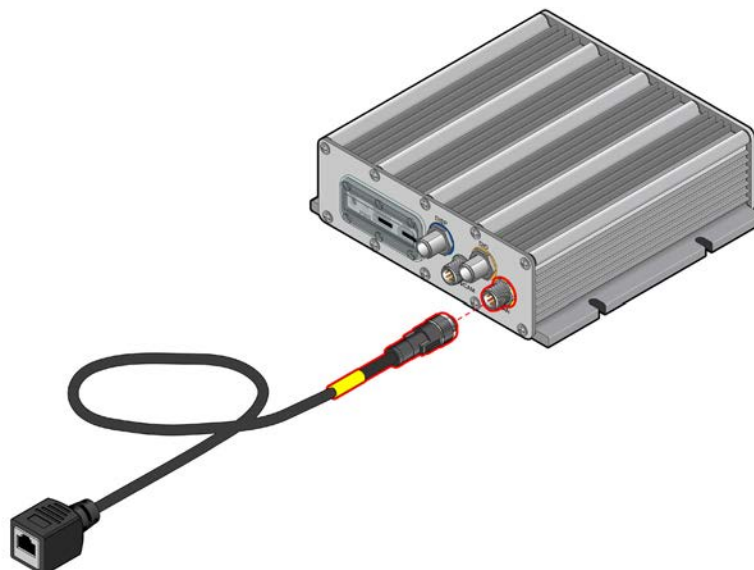


Figure 73: Connecting the Ethernet cable


Note:

It is strongly recommended to secure the I/O port connection on the VIA Mobile360 M800 system with LOCTITE 243 Threadlocker (not included) before connecting a cable. Refer to [Appendix A](#) for instructions.

B.5 CAN Bus/RS-232 Cable

The optional CAN Bus/RS-232 cable can be used to add custom accessories to the VIA Mobile360 M800 system.



Figure 74: CAN Bus and RS-232 cable

The cable includes a DB9 head for an RS-232 connection (TX/RX), and exposed wires for CAN high, CAN low, Shield ground, 12V DC-out and ground.

Pin	Signal
2	RS-232 RX
3	RS-232 TX
5	GND
1,4 and 6-9	Not used

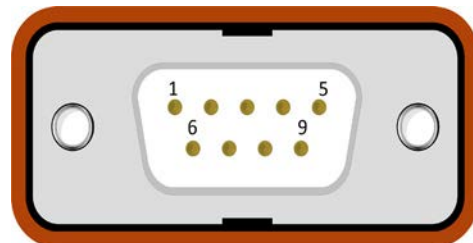


Figure 75: DB9 connector pin diagram

Table 13: DB9 connector's pin-outs

Signal	Signal Direction	VIH/VOH		VIL/VOL	
CAN-H	In/Out	Dominant output state		Dominant output state	
		VCAN_H	2.75 to 4.5V	VCAN_H	2.0 to 3.0V
		VCAN_L	0.5 to 2.25V	VCAN_L	2.0 to 3.0V
		Vdiff	1.5~3.0V@ 115mA max	Vdiff	-0.5~0.05V@ 5mA max
CAN-L	In/Out	Dominant input state		Dominant input state	
		VCAN_H	-12 to 12V	VCAN_H	-12 to 12V
		VCAN_L	-12 to 12V	VCAN_L	-12 to 12V
		Vdiff	0.9 to 5.0V	Vdiff	-1.0 to 0.5V
DC12V OUT	Out	12V±5% @100mA Max		0V	
GROUND	Out	0V		0V	
Shield GND	Out	0V		0V	

Table 14: CAN Bus/RS-232 cable exposed wire specifications

The CAN Bus/RS-232 cable connects to the green color-coded CAN/COM port located on the front panel of the VIA Mobile360 M800 system, as shown below.

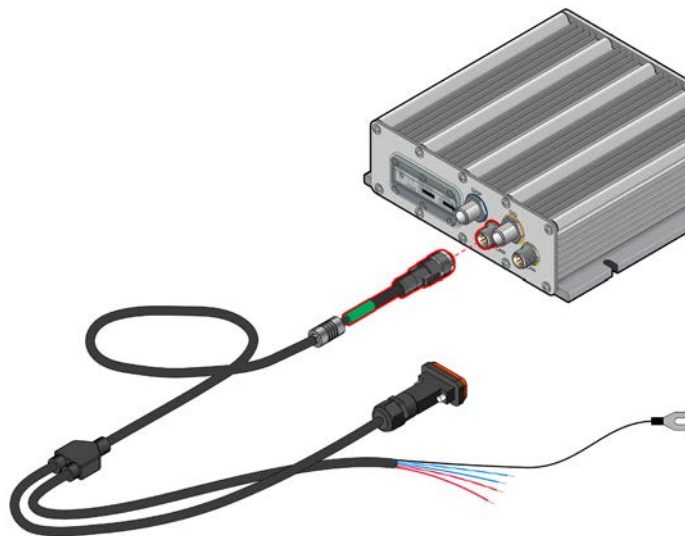


Figure 76: Connecting the CAN Bus/RS-232 cable



Note:

It is strongly recommended to secure the I/O port connection on the VIA Mobile360 M800 system with LOCTITE 243 Threadlocker (not included) before connecting a cable. Refer to [Appendix A](#) for instructions.

B.6 Development Kit

The optional development kit can be used to access the system debug console for development purposes as well as provide connection to the system's GPIO interfaces.



Figure 77: Development kit

To install the developer kit, follow the steps below.

1. Connect the 4-pin UART interface on the DIO cable to the 4-pin UART pin header on the debug board.

Pin	Signal
1	VCC
2	OUT
3	IN
4	GND

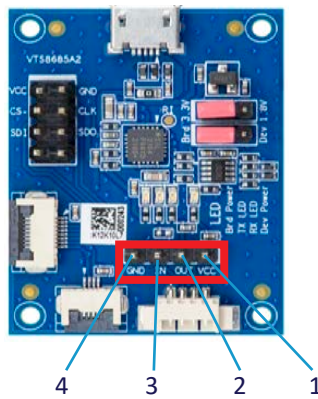


Figure 78: Debug board's UART pin header diagram

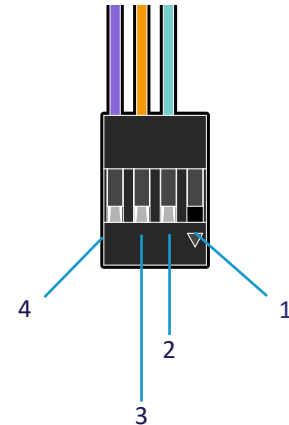


Figure 79: DIO cable UART Connector pin-outs

Table 15: Debug board's UART pin-outs

2. Connect the DIO cable to the orange color-coded DIO port located on the front panel of the VIA Mobile360 M800 system.

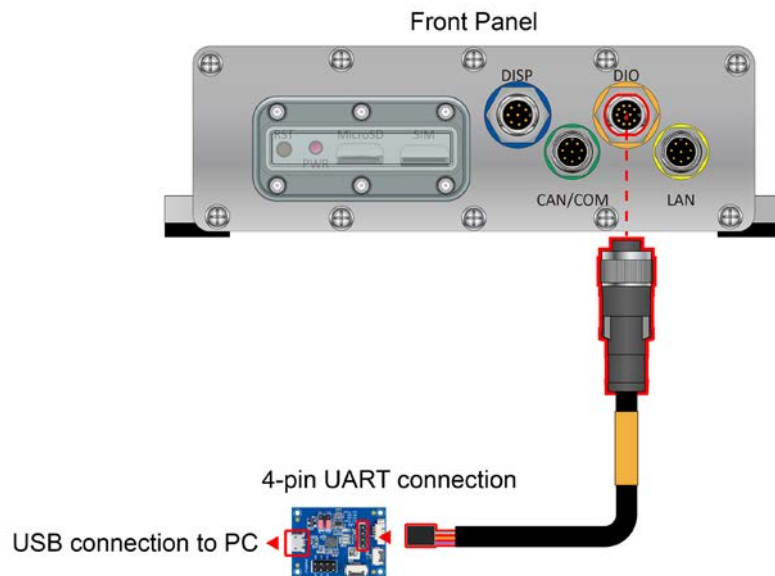


Figure 80: DIO to debug board and system connection



Note:

It is strongly recommended to secure the I/O port connection on the VIA Mobile360 M800 system with LOCTITE 243 Threadlocker (not included) before connecting a cable. Refer to [Appendix A](#) for instructions.

3. Connect the development board to a computer with a micro USB cable (**not included**).
4. To connect to an indoor power supply, connect the PWR/CAN RD testing cable to the red color-coded PWR/CAN port located on the rear panel of the VIA Mobile360 M800 system.

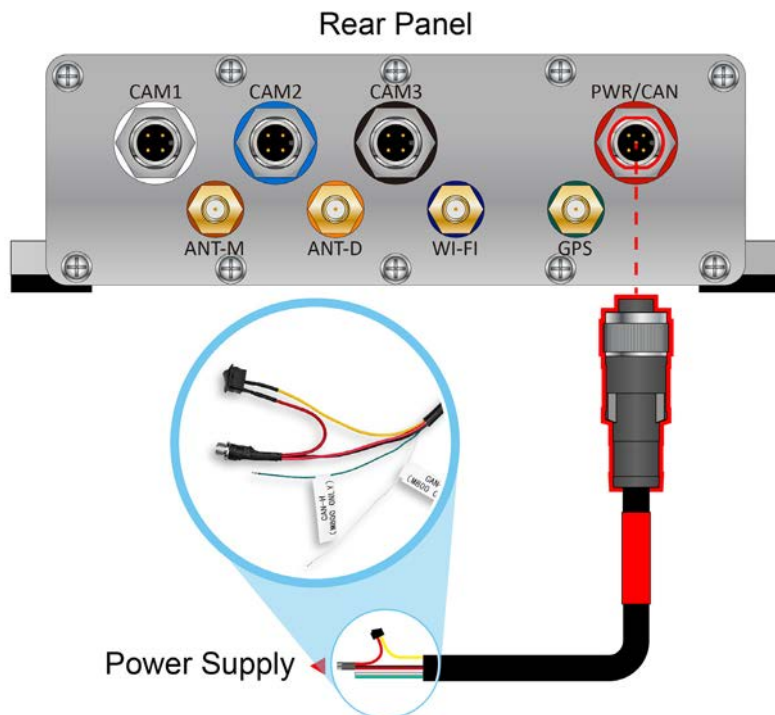


Figure 81: PWR/CAN RD testing cable connection


Note:

It is strongly recommended to secure the I/O port connection on the VIA Mobile360 M800 system with LOCTITE 243 Threadlocker (not included) before connecting a cable. Refer to [Appendix A](#) for instructions.

5. A power adapter which outputs 9~36V 3A is required to power the system (**not included**). Connect the power supply to the female power terminal on the PWR/CAN RD testing cable. Plug the other end of the power supply to an electrical outlet.
 - The power adapter's male terminal must match the following specifications.
 - Length: 12mm ± 0.5mm
 - Inner Diameter: 2.1mm
 - Outer Diameter: 5.5mm
6. To power ON the VIA Mobile360 M800 system, turn the switch connected to the PWR/CAN RD testing cable to ON. This will simulate the ACC signal from a vehicle.

The PWR/CAN RD testing cable includes CAN high (CAN-H) and CAN low (CAN-L) wires which can be used to receive CAN Bus signals.

Signal	Signal Direction	VIH/VOH		VIL/VOL	
CAN-H	In/Out	Dominant output state		Dominant output state	
		VCAN_H	2.75 to 4.5V	VCAN_H	2.0 to 3.0V
		VCAN_L	0.5 to 2.25V	VCAN_L	2.0 to 3.0V
		Vdiff	1.5~3.0V@ 115mA max	Vdiff	-0.5~0.05V@ 5mA max
CAN-L	In/Out	Dominant input state		Dominant input state	
		VCAN_H	-12 to 12V	VCAN_H	-12 to 12V
		VCAN_L	-12 to 12V	VCAN_L	-12 to 12V
		Vdiff	0.9 to 5.0V	Vdiff	-1.0 to 0.5V

Table 16: PWR/CAN RD testing cable CAN-H/CAN-L specifications

The DIO cable also includes exposed wires for GPIO, DC12V power-out and ground connections.

Signal	Pin Direction	VIH/VOH	VIL/VOL
GPI1	In	7~33V @1mA Max	0~2V @0.1mA Max
GPI2	In	7~33V @1mA Max	0~2V @0.1mA Max
GPI3	In	7~33V @1mA Max	0~2V @0.1mA Max
GPI5	In	7~33V @1mA Max	0~2V @0.1mA Max
GPI6	In	7~33V @1mA Max	0~2V @0.1mA Max
GPO1	Out	VIN @ VIN/2A (max 30mA)	0V @0mA
GPO2	Out	VIN @ VIN/2A (max 30mA)	0V @0mA
DC12V Out	Out	12V±5% @100mA Max	0V
GND	Out	0V	0V

Table 17: DIO cable exposed wires specifications



Taiwan Headquarters

1F, 531 Zhong-zheng Road,
Xindian Dist., New Taipei City 231
Taiwan

Tel: 886-2-2218-5452
Fax: 886-2-2218-9860
Email: embedded@via.com.tw



USA

940 Mission Court
Fremont, CA 94539,
USA

Tel: 1-510-687-4688
Fax: 1-510-687-4654
Email: embedded@viatech.com



Japan

3-15-7 Ebisu MT Bldg. 6F,
Higashi, Shibuya-ku
Tokyo 150-0011
Japan

Tel: 81-3-5466-1637
Fax: 81-3-5466-1638
Email: embedded@viatech.co.jp



China

Tsinghua Science Park Bldg. 7
No. 1 Zongguancun East Road,
Haidian Dist., Beijing, 100084
China

Tel: 86-10-59852288
Fax: 86-10-59852299
Email: embedded@viatech.com.cn



Europe

Email: embedded@via-tech.eu